


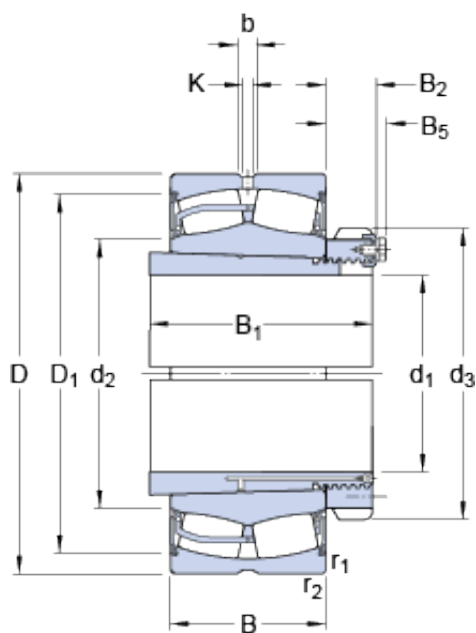

Bearing No. 23052-2CS5K/VT143 + OH 3052 HE

D	400 mm
K	9 mm
B	104 mm
b	16.7 mm
Size (mm)	400x240x104
Width (mm)	104
d ₁	240 mm
B ₂	34 mm
d ₃	310 mm
B ₁	145 mm
B ₅	46 mm
d ₃	310 mm
B ₁	145 mm
D ₁	369 mm
d ₂	289 mm
d ₁	240 mm
B ₂	34 mm
B ₅	46 mm
Bearing number	23052-2CS5K/VT143 + OH 3052 HE
Limiting speed	360 r/min
Bore Diameter (mm)	400
r _a max.	3 mm
B _a min.	11 mm
D _a max.	385 mm
d _b min.	272 mm
d _a max.	289 mm
Outer Diameter (mm)	240
Calculation factor e	0.22

$r_{1,2}$ min.	4 mm
r_a - max.	3 mm
B_a - min.	11 mm
d_a - max.	289 mm
d_b - min.	272 mm
D_a - max.	385 mm
D_1 ?	369 mm
Mass bearing + sleeve	57.9 kg
d_2 ?	289 mm
Calculation factor - e	0.22
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	1677 kN
Basic dynamic load rating - C	1677 kN
Fatigue load limit P_u	212 kN
Calculation factor Y_1	3
Calculation factor Y_2	4.6
Calculation factor Y_0	2.8
Calculation factor - Y_2	4.6
Calculation factor - Y_1	3
Fatigue load limit - P_u	212 kN
Basic static load rating C_0	2550 kN
Basic static load rating - C_0	2550 kN