


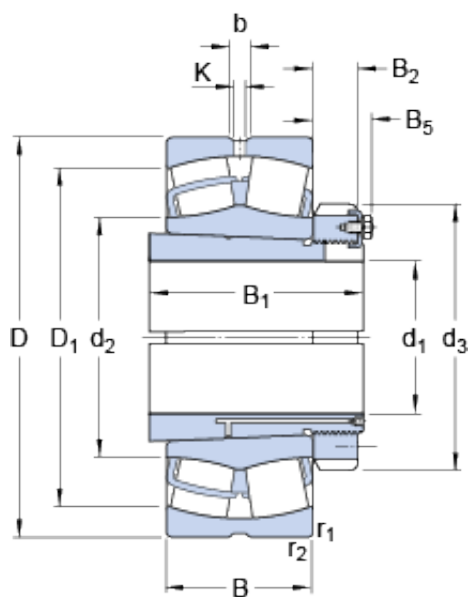

Bearing No. 23076 CCK/W33 + OH 3076 H

K	12 mm
b	22.3 mm
D	560 mm
B	135 mm
Size (mm)	560x360x135
Width (mm)	135
D ₁	509 mm
B ₁	193 mm
B ₅	62 mm
B ₂	48 mm
d ₃	450 mm
B ₁	193 mm
d ₁	360 mm
d ₂	426 mm
d ₁	360 mm
B ₂	48 mm
B ₅	62 mm
d ₃	450 mm
Bearing number	23076 CCK/W33 + OH 3076 H
Limiting speed	1200 r/min
Reference speed	900 r/min
Bore Diameter (mm)	560
r _a max.	4 mm
B _a min.	15 mm
D _a max.	542 mm
d _b min.	396 mm
d _a max.	426 mm
Outer Diameter (mm)	360

d_a - max.	426 mm
Calculation factor e	0.22
$r_{1,2}$ min.	5 mm
r_a - max.	4 mm
B_a - min.	15 mm
D_a - max.	542 mm
d_b - min.	396 mm
D_1 ?	509 mm
d_2 ?	426 mm
Mass bearing + sleeve	145 kg
Calculation factor - e	0.22
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	2984 kN
Basic dynamic load rating - C	2984 kN
Fatigue load limit P_u	360 kN
Calculation factor Y_1	3
Calculation factor Y_2	4.6
Calculation factor Y_0	2.8
Calculation factor - Y_2	4.6
Calculation factor - Y_1	3
Fatigue load limit - P_u	360 kN
Basic static load rating C_0	5000 kN
Basic static load rating - C_0	5000 kN