


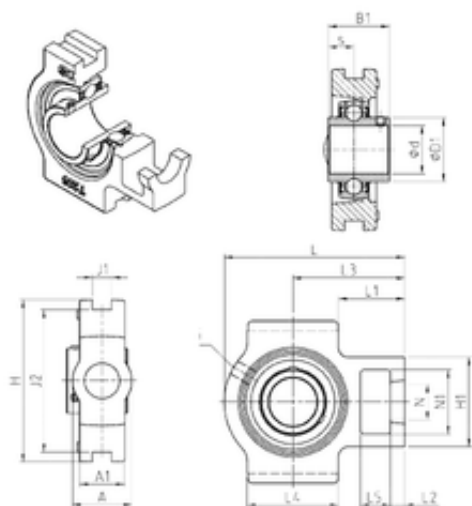

Bearing No. UCT207

|        |          |
|--------|----------|
| C      | 25.7 kN  |
| A      | 37 mm    |
| S      | 17.5 mm  |
| G      | M6x1     |
| B      | 42.9 mm  |
| L      | 129 mm   |
| H      | 102 mm   |
| N      | 22 mm    |
| s      | 17,5 mm  |
| d      | 35 mm    |
| A1     | 30 mm    |
| SW     | 4 mm     |
| s1     | 21.45 mm |
| N2     | 37 mm    |
| H2     | 64 mm    |
| L4     | 64 mm    |
| A5     | 25.4 mm  |
| L5     | 16 mm    |
| A2     | 30 mm    |
| J2     | 89 mm    |
| N1     | 37 mm    |
| C0     | 15.2 kN  |
| L1     | 46 mm    |
| L2     | 13 mm    |
| H1     | 64 mm    |
| L3     | 78 mm    |
| D1     | 48 mm    |
| B1     | 42,9 mm  |
| J1     | 12 mm    |
| T max. | 100 °C   |
|        |          |

|                                             |         |
|---------------------------------------------|---------|
| Weight                                      | 1,6 Kg  |
| T min.                                      | -20 °C  |
| Thread (G)                                  | M6x1    |
| Bearing number                              | UCT207  |
| Bore Diameter (mm)                          | 35      |
| Designation of housing                      | T207-   |
| Designation of bearing                      | UC207G2 |
| Basic dynamic load rating (C)               | 25,7 kN |
| Recommended tightening torque for set screw | 11.5 Nm |