


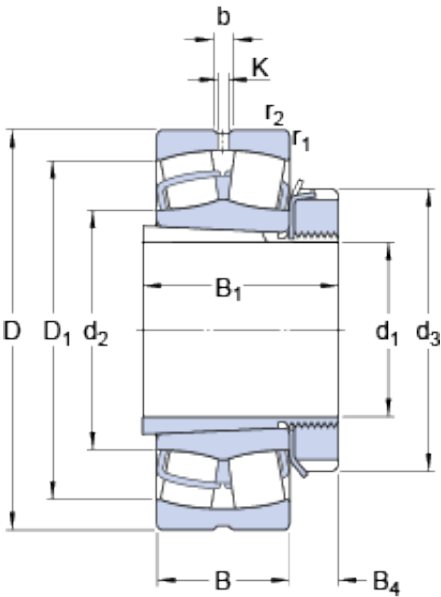

Bearing No. 23120 CCK/W33 + H 3120

D	165 mm
B	52 mm
b	6 mm
K	3 mm
Size (mm)	165x90x52
Width (mm)	52
d ₃	130 mm
d ₁	90 mm
B ₄	20 mm
B ₁	76 mm
d ₁	90 mm
d ₂	115 mm
D ₁	144 mm
B ₁	76 mm
B ₄	20 mm
d ₃	130 mm
Bearing number	23120 CCK/W33 + H 3120
Limiting speed	4000 r/min
Reference speed	3000 r/min
Bore Diameter (mm)	165
r _a max.	2 mm
B _a min.	6 mm
D _a max.	154 mm
d _b min.	107 mm
d _a max.	115 mm
Outer Diameter (mm)	90
Calculation factor e	0.3
r _{1,2} min.	2 mm

r_a - max.	2 mm
B_a - min.	6 mm
D_a - max.	154 mm
d_b - min.	107 mm
d_a - max.	115 mm
d_2 ?	115 mm
Mass bearing + sleeve	6.15 kg
D_1 ?	144 mm
Calculation factor - e	0.3
$r_{1,2}$ - min.	2 mm
Basic dynamic load rating C	385 kN
Basic dynamic load rating - C	385 kN
Fatigue load limit P_u	53 kN
Calculation factor Y_1	2.3
Calculation factor Y_2	3.4
Calculation factor Y_0	2.2
Calculation factor - Y_1	2.3
Calculation factor - Y_2	3.4
Fatigue load limit - P_u	53 kN
Basic static load rating C_0	490 kN
Basic static load rating - C_0	490 kN