


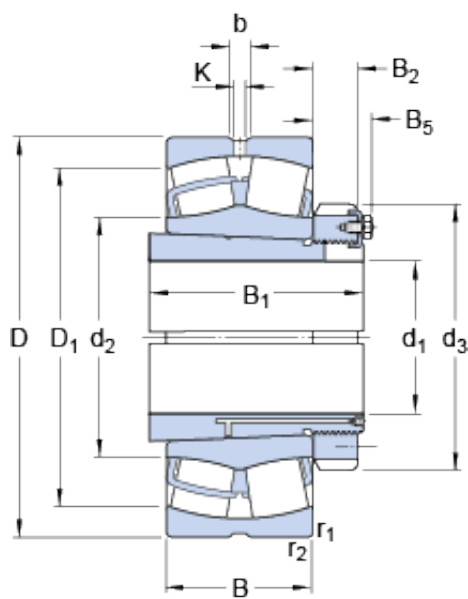

Bearing No. 23164 CCK/W33 + OH 3164 H

K	12 mm
b	22.3 mm
D	540 mm
B	176 mm
Size (mm)	540x300x176
Width (mm)	176
D ₁	465 mm
B ₁	226 mm
B ₅	56 mm
B ₂	42 mm
d ₃	400 mm
B ₁	226 mm
d ₁	300 mm
d ₂	370 mm
d ₁	300 mm
B ₂	42 mm
B ₅	56 mm
d ₃	400 mm
Bearing number	23164 CCK/W33 + OH 3164 H
Limiting speed	1100 r/min
Reference speed	850 r/min
Bore Diameter (mm)	540
r _a max.	4 mm
B _a min.	13 mm
D _a max.	520 mm
d _b min.	338 mm
d _a max.	370 mm
Outer Diameter (mm)	300

d_a - max.	370 mm
Calculation factor e	0.31
$r_{1,2}$ min.	5 mm
r_a - max.	4 mm
B_a - min.	13 mm
D_a - max.	520 mm
d_b - min.	338 mm
D_1 ?	465 mm
d_2 ?	370 mm
Mass bearing + sleeve	185 kg
Calculation factor - e	0.31
$r_{1,2}$ - min.	5 mm
Basic dynamic load rating C	3923 kN
Basic dynamic load rating - C	3923 kN
Fatigue load limit P_u	440 kN
Calculation factor Y_1	2.2
Calculation factor Y_2	3.3
Calculation factor Y_0	2.2
Calculation factor - Y_2	3.3
Calculation factor - Y_1	2.2
Fatigue load limit - P_u	440 kN
Basic static load rating C_0	6000 kN
Basic static load rating - C_0	6000 kN