


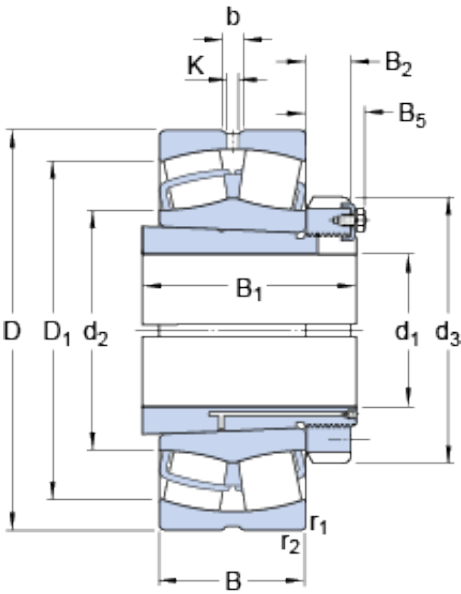

Bearing No. 23184 CKJ/W33 + OH 3184 H

K	12 mm
b	22.3 mm
D	700 mm
B	224 mm
Size (mm)	700x400x224
Width (mm)	224
D ₁	607 mm
B ₁	304 mm
B ₅	90 mm
B ₂	70 mm
d ₃	540 mm
B ₁	304 mm
d ₁	400 mm
d ₂	483 mm
d ₁	400 mm
B ₂	70 mm
B ₅	90 mm
d ₃	540 mm
Bearing number	23184 CKJ/W33 + OH 3184 H
Limiting speed	900 r/min
Reference speed	480 r/min
Bore Diameter (mm)	700
r _a max.	5 mm
B _a min.	16 mm
D _a max.	674 mm
d _b min.	443 mm
d _a max.	483 mm
Outer Diameter (mm)	400

d_a - max.	483 mm
Calculation factor e	0.3
$r_{1,2}$ min.	6 mm
r_a - max.	5 mm
B_a - min.	16 mm
D_a - max.	674 mm
d_b - min.	443 mm
D_1 ?	607 mm
d_2 ?	483 mm
Mass bearing + sleeve	410 kg
Calculation factor - e	0.3
$r_{1,2}$ - min.	6 mm
Basic dynamic load rating C	5919 kN
Basic dynamic load rating - C	5919 kN
Fatigue load limit P_u	620 kN
Calculation factor Y_1	2.3
Calculation factor Y_2	3.4
Calculation factor Y_0	2.2
Calculation factor - Y_2	3.4
Calculation factor - Y_1	2.3
Fatigue load limit - P_u	620 kN
Basic static load rating C_0	9300 kN
Basic static load rating - C_0	9300 kN