


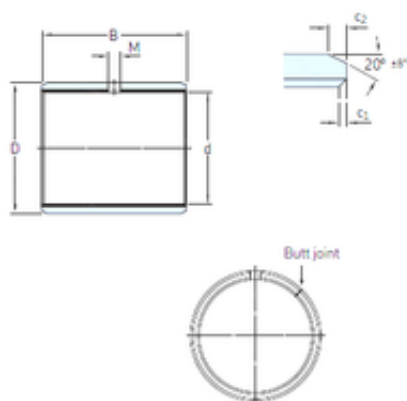

Bearing No. PCZ 8060 E

D	131,763 mm
d	127 mm
B	95,25 mm
M	– mm
Weight	0,7 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	127x131.763x95.25
Width (mm)	95,25
Mass bushing	0.7 kg
? ±8	20 °
Bearing number	PCZ 8060 E
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	127
Outer Diameter (mm)	131,763
Housing bore range min.	131.684 mm
Housing bore range max.	131.724 mm
Shaft diameter range min.	126.901 mm
Shaft diameter range max.	126.964 mm
Basic dynamic load rating (C)	950 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	950 kN
Basic static load rating - radial direction C_0	3000 kN
Factor depending on material and bearing type K_M	480