


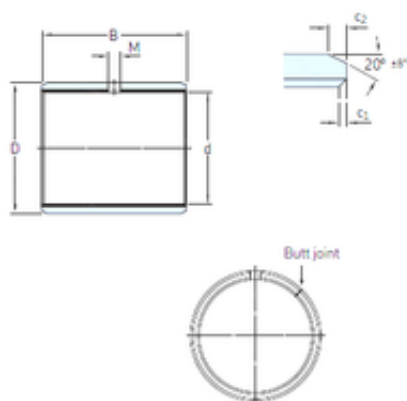

Bearing No. PCZ 9648 E

D	157,163 mm
d	152,4 mm
B	76,2 mm
M	– mm
Weight	0,67 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	152.4x157.163x76.2
Width (mm)	76,2
Mass bushing	0.67 kg
? ±8	20 °
Bearing number	PCZ 9648 E
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	152,4
Outer Diameter (mm)	157,163
Housing bore range min.	157.119 mm
Housing bore range max.	157.16 mm
Shaft diameter range min.	152.337 mm
Shaft diameter range max.	152.4 mm
Basic dynamic load rating (C)	915 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	915 kN
Basic static load rating - radial direction C_0	2850 kN
Factor depending on material and bearing type K_M	480