


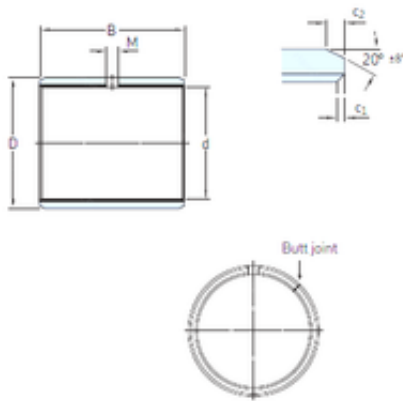

Bearing No. PCZ 3640 M

D	61,913 mm
d	57,15 mm
B	63,5 mm
M	6 mm
Weight	0,195 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	57.15x61.913x63.5
Width (mm)	63,5
Mass bushing	0.2 kg
? ±8	20 °
Bearing number	PCZ 3640 M
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	57,15
Outer Diameter (mm)	61,913
Housing bore range min.	61.913 mm
Housing bore range max.	61.943 mm
Shaft diameter range min.	56.794 mm
Shaft diameter range max.	56.84 mm
Basic dynamic load rating (C)	430 kN
Specific dynamic load factor K	120 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2.5 m/s

velocity v max.	
Coefficient of friction μ min.	0.02
Coefficient of friction μ max.	0.2
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	430 kN
Basic static load rating - radial direction C_0	900 kN
Factor depending on material and bearing type K_M	1900