


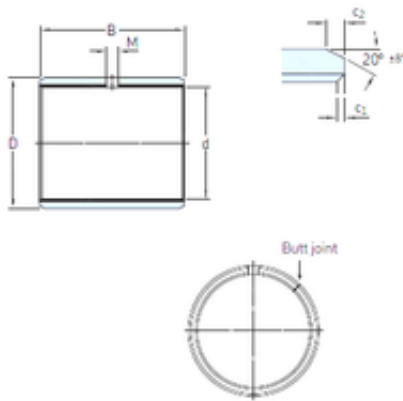

Bearing No. PCZ 3648 E

D	61,913 mm
d	57,15 mm
B	76,2 mm
M	– mm
Weight	0,25 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	57.15x61.913x76.2
Width (mm)	76,2
Mass bushing	0.25 kg
? ±8	20 °
Bearing number	PCZ 3648 E
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	57,15
Outer Diameter (mm)	61,913
Housing bore range min.	61.887 mm
Housing bore range max.	61.918 mm
Shaft diameter range min.	57.122 mm
Shaft diameter range max.	57.168 mm
Basic dynamic load rating (C)	345 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	345 kN
Basic static load rating - radial direction C_0	1080 kN
Factor depending on material and bearing type K_M	480