


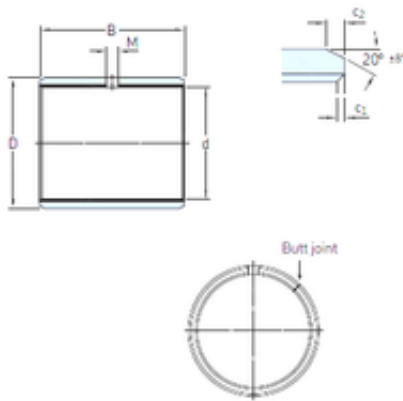

Bearing No. PCZ 4040 M

D	68,263 mm
d	63,5 mm
B	63,5 mm
M	6 mm
Weight	0,215 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	63.5x68.263x63.5
Width (mm)	63,5
Mass bushing	0.21 kg
? ±8	20 °
Bearing number	PCZ 4040 M
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	63,5
Outer Diameter (mm)	68,263
Housing bore range min.	68.263 mm
Housing bore range max.	68.293 mm
Shaft diameter range min.	63.137 mm
Shaft diameter range max.	63.182 mm
Basic dynamic load rating (C)	480 kN
Specific dynamic load factor K	120 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2.5 m/s

velocity v max.	
Coefficient of friction μ min.	0.02
Coefficient of friction μ max.	0.2
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	480 kN
Basic static load rating - radial direction C_0	1000 kN
Factor depending on material and bearing type K_M	1900