


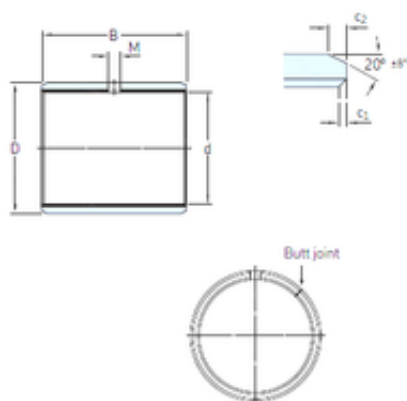

Bearing No. PCZ 4456 E

D	74,613 mm
d	69,85 mm
B	88,9 mm
M	– mm
Weight	0,365 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	69.85x74.613x88.9
Width (mm)	88,9
Mass bushing	0.36 kg
? ±8	20 °
Bearing number	PCZ 4456 E
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	69,85
Outer Diameter (mm)	74,613
Housing bore range min.	74.569 mm
Housing bore range max.	74.6 mm
Shaft diameter range min.	69.804 mm
Shaft diameter range max.	69.85 mm
Basic dynamic load rating (C)	490 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	490 kN
Basic static load rating - radial direction C_0	1530 kN
Factor depending on material and bearing type K_M	480