


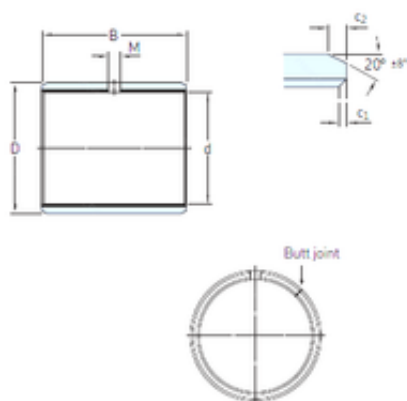

Bearing No. PCZ 5640 E

D	93,663 mm
d	88,9 mm
B	63,5 mm
M	– mm
Weight	0,33 Kg
c1 min	0,2 mm
c2 min	1,2 mm
Size (mm)	88.9x93.663x63.5
Width (mm)	63,5
Mass bushing	0.33 kg
? ±8	20 °
Bearing number	PCZ 5640 E
c ₂ max.	2.4 mm
c ₁ min.	0.2 mm
c ₁ max.	1 mm
c ₂ min.	1.2 mm
Bore Diameter (mm)	88,9
Outer Diameter (mm)	93,663
Housing bore range min.	93.619 mm
Housing bore range max.	93.655 mm
Shaft diameter range min.	88.844 mm
Shaft diameter range max.	88.9 mm
Basic dynamic load rating (C)	440 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	440 kN
Basic static load rating - radial direction C_0	1370 kN
Factor depending on material and bearing type K_M	480