


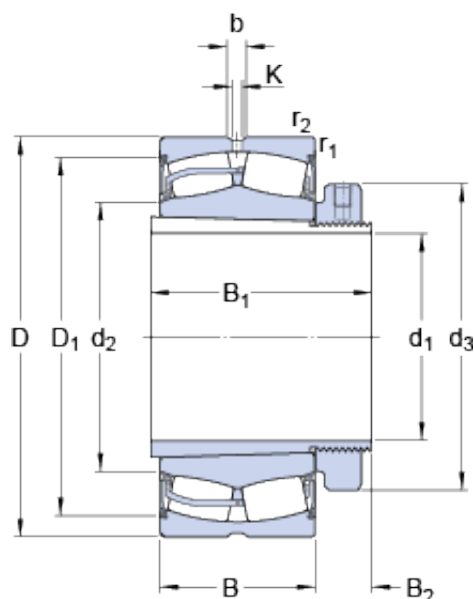

Bearing No. 23222-2CS5K/VT143 + H 2322 E

D	200 mm
B	69.8 mm
b	8.3 mm
K	4.5 mm
Size (mm)	200x100x69.8
Width (mm)	69,8
B ₂	21.5 mm
B ₁	105 mm
d ₃	145 mm
d ₁	100 mm
d ₁	100 mm
d ₂	126 mm
D ₁	178 mm
B ₁	105 mm
Limiting speed	640 r/min
Bearing number	23222-2CS5K/VT143 + H 2322 E
r _a max.	2 mm
B _a min.	17 mm
D _a max.	188 mm
d _b min.	121 mm
d _a max.	126 mm
Bore Diameter (mm)	200
Outer Diameter (mm)	100
D _a - max.	188 mm
B _a - min.	17 mm
r _a - max.	2 mm
d _a - max.	126 mm
Calculation factor e	0.33
r _{1,2} min.	2.1 mm

d_b - min.	121 mm
Mass bearing + sleeve	12.3 kg
D_1 ?	178 mm
d_2 ?	126 mm
$r_{1,2}$ - min.	2.1 mm
Calculation factor - e	0.33
Basic dynamic load rating C	627 kN
Basic dynamic load rating - C	627 kN
Fatigue load limit P_u	76.5 kN
Calculation factor Y_1	2
Calculation factor Y_2	3
Calculation factor Y_0	2
Calculation factor - Y_2	3
Calculation factor - Y_1	2
Fatigue load limit - P_u	76.5 kN
Basic static load rating C_0	765 kN
Basic static load rating - C_0	765 kN