


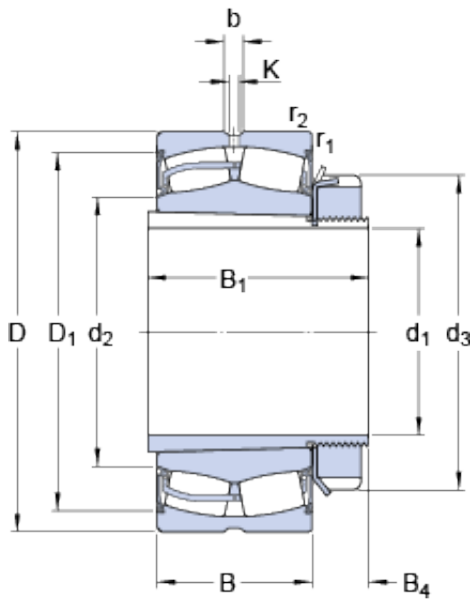

Bearing No. 23240-2CS5K/VT143 + H 2340 L

K	9 mm
b	16.7 mm
D	360 mm
B	128 mm
Size (mm)	360x180x128
Width (mm)	128
d_1	180 mm
B_1	176 mm
d_3	240 mm
B_4	31.5 mm
d_2	229 mm
D_1	320 mm
d_3	240 mm
d_1	180 mm
B_1	176 mm
B_4	31.5 mm
Bearing number	23240-2CS5K/VT143 + H 2340 L
Limiting speed	340 r/min
Bore Diameter (mm)	360
r_a max.	3 mm
B_a min.	19 mm
D_a max.	343 mm
d_b min.	216 mm
d_a max.	229 mm
Outer Diameter (mm)	180
Calculation factor e	0.33
$r_{1,2}$ min.	4 mm
B_a - min.	19 mm

D_a - max.	343 mm
r_a - max.	3 mm
d_b - min.	216 mm
d_a - max.	229 mm
d_2 ?	229 mm
Mass bearing + sleeve	69.3 kg
D_1 ?	320 mm
Calculation factor - e	0.33
$r_{1,2}$ - min.	4 mm
Basic dynamic load rating C	1950 kN
Basic dynamic load rating - C	1950 kN
Fatigue load limit P_u	232 kN
Calculation factor Y_1	2
Calculation factor Y_2	3
Calculation factor Y_0	2
Calculation factor - Y_1	2
Calculation factor - Y_2	3
Fatigue load limit - P_u	232 kN
Basic static load rating C_0	2700 kN
Basic static load rating - C_0	2700 kN