


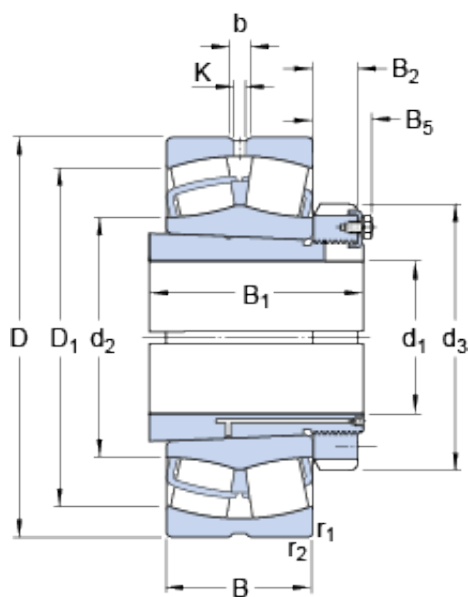

Bearing No. 23972 CCK/W33 + OH 3972 H

K	6 mm
b	11.1 mm
D	480 mm
B	90 mm
Size (mm)	480x340x90
Width (mm)	90
D ₁	447 mm
B ₁	144 mm
B ₅	58 mm
B ₂	45 mm
d ₃	420 mm
B ₁	144 mm
d ₁	340 mm
d ₂	394 mm
d ₁	340 mm
B ₂	45 mm
B ₅	58 mm
d ₃	420 mm
Bearing number	23972 CCK/W33 + OH 3972 H
Limiting speed	1300 r/min
Reference speed	1200 r/min
Bore Diameter (mm)	480
r _a max.	2.5 mm
B _a min.	14 mm
D _a max.	467 mm
d _b min.	372 mm
d _a max.	394 mm
Outer Diameter (mm)	340

d_a - max.	394 mm
Calculation factor e	0.15
$r_{1,2}$ min.	3 mm
r_a - max.	2.5 mm
B_a - min.	14 mm
D_a - max.	467 mm
d_b - min.	372 mm
D_1 ?	447 mm
d_2 ?	394 mm
Mass bearing + sleeve	70.5 kg
Calculation factor - e	0.15
$r_{1,2}$ - min.	3 mm
Basic dynamic load rating C	1456 kN
Basic dynamic load rating - C	1456 kN
Fatigue load limit P_u	220 kN
Calculation factor Y_1	4.5
Calculation factor Y_2	6.7
Calculation factor Y_0	4.5
Calculation factor - Y_2	6.7
Calculation factor - Y_1	4.5
Fatigue load limit - P_u	220 kN
Basic static load rating C_0	2750 kN
Basic static load rating - C_0	2750 kN