


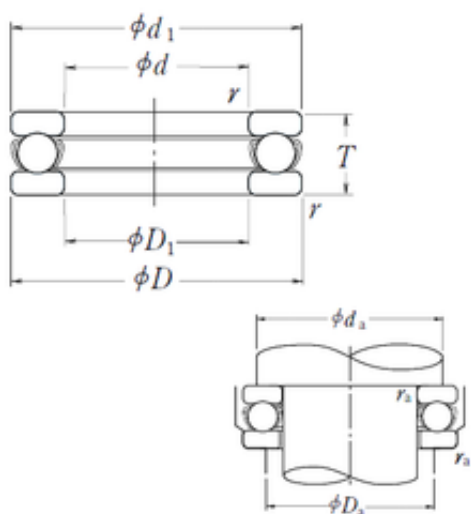

Bearing No. 51334X

C	465
r	3
d	170 mm
D	280 mm
T	87 mm
Z_	15
ra	2.5
D_	280
C0	1570
da	235
B_	87
D1	174 mm
d1	275 mm
T_	87
SRE	22.3
D_1	174
SRI	22.3
D_a	215
DA_	41.275
yobi	51334X
SREN	0
SRIN	0
SRIX	0.16
SDM_	225
mass	20.3
KBRG	5111
SREX	0.16
Weight	20,3 Kg
r min.	3 mm
LangID	1

ra max.	2,5 mm
da min.	235 mm
Da max.	215 mm
Oil rpm	900
GRS rpm	600
hidYobi	51334X
hidTable	ecat_NSSDTB
Size (mm)	170x280x87
Prod_Type3	TB_SD_WFS
Width (mm)	87
Bearing number	51334X
Bore Diameter (mm)	170
Outer Diameter (mm)	280
(Grease) Lubrication Speed	600 r/min
Basic static load rating (C0)	1570 kN
Basic dynamic load rating (C)	465 kN