


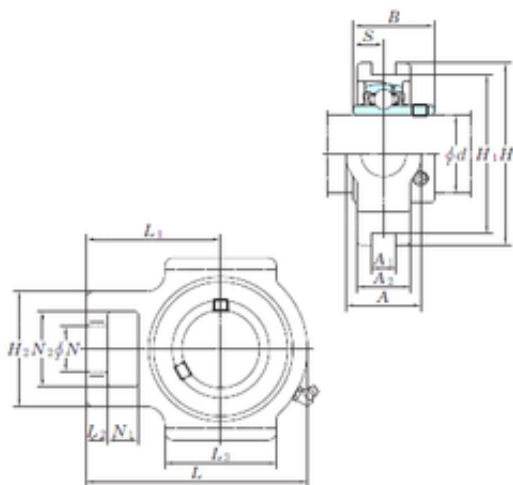

Bearing No. UCST209H1S6

|                               |             |
|-------------------------------|-------------|
| H                             | 117 mm      |
| L                             | 137 mm      |
| d                             | 45 mm       |
| S                             | 19 mm       |
| A                             | 49 mm       |
| N                             | 29 mm       |
| B                             | 49,2 mm     |
| N1                            | 20 mm       |
| L1                            | 85 mm       |
| H2                            | 74 mm       |
| H1                            | 102 mm      |
| N2                            | 49 mm       |
| A1                            | 16 mm       |
| L3                            | 66 mm       |
| L2                            | 14 mm       |
| A2                            | 34 mm       |
| Weight                        | 2,1 Kg      |
| Bearing number                | UCST209H1S6 |
| Bore Diameter (mm)            | 45          |
| Basic dynamic load rating (C) | 27,8 kN     |
| Basic static load rating (C0) | 16,2 kN     |