


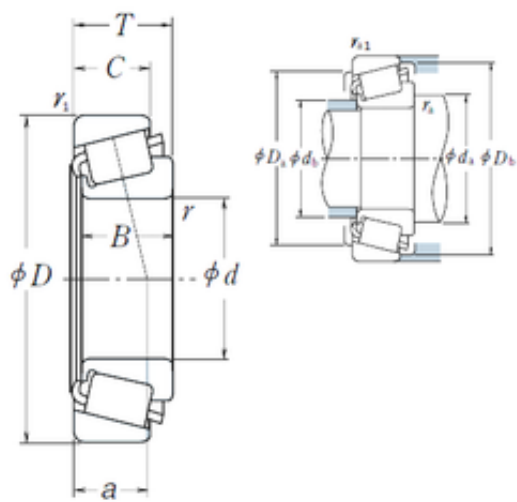

Bearing No. LM328448/LM328410

e	0.36
d	139,7 mm
D	187,325 mm
T	28,575 mm
B	29,37 mm
C	23,02 mm
a	31,7 mm
Da	176 mm
B_	29.37
Db	182 mm
da	149 mm
Y0	0.93
db	147 mm
C0	305
D_	187.325
Z_	39
C_	23.02
Y1	1.7
DE_	174.155
SLR	21
D_a	176
DI_	154.596
DA1	10.148
DA2	9.6
CUP	0.67
DA_	9.874
D_b	182
RAr	387.655
SDM_	164.333
KBRG	3161

yobi	LM328448/LM328410
CONE	1.59
ALP21	26
ALP22	40
ALP23	0
BETA_	0
BET21	1
BET23	0
BET22	30
r min.	1,5 mm
LangID	1
Weight	2,26 Kg
ALPHA_	13.333
r1 min.	1,5 mm
ra max.	1,5 mm
Oil rpm	2200
outer r	1.5
hidYobi	LM328448/LM328410
GRS rpm	1700
inner r	1.5
hidTable	ecat_NSTPRI
inner ra	1.5
outer rb	1.5
ra1 max.	1,5 mm
Size (mm)	139.7x187.325x28.575
SHOG_yobi	LM328448/LM328410
Prod_Type3	TRBSR_ID_A
Width (mm)	28,575
Bearing number	LM328448/LM328410
Bore Diameter (mm)	139,7
Outer Diameter (mm)	187,325
Calculation factor (e)	0,36

(Oil) Lubrication Speed	2200 r/min
Calculation factor (Y0)	0,93
(Grease) Lubrication Speed	1700 r/min
Basic static load rating (C0)	305 kN
Basic dynamic load rating (C)	153 kN