


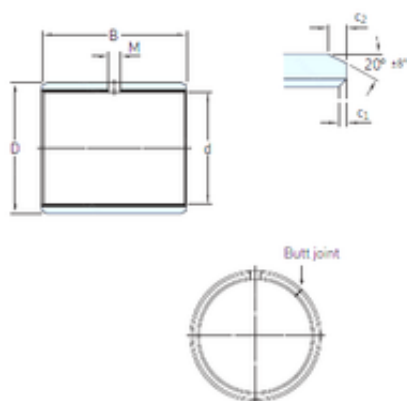

Bearing No. PCZ 2616 E

D	45,244 mm
d	41,275 mm
B	25,4 mm
M	– mm
Weight	0,053 Kg
c1 min	0,1 mm
c2 min	0,8 mm
Size (mm)	41.275x45.244x25.4
Width (mm)	25,4
Mass bushing	0.053 kg
? ±8	20 °
Bearing number	PCZ 2616 E
c ₂ max.	1.6 mm
c ₁ min.	0.1 mm
c ₁ max.	0.7 mm
c ₂ min.	0.8 mm
Bore Diameter (mm)	41,275
Outer Diameter (mm)	45,244
Housing bore range min.	45.232 mm
Housing bore range max.	45.258 mm
Shaft diameter range min.	41.204 mm
Shaft diameter range max.	41.245 mm
Basic dynamic load rating (C)	81,5 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	81.5 kN
Basic static load rating - radial direction C_0	255 kN
Factor depending on material and bearing type K_M	480