


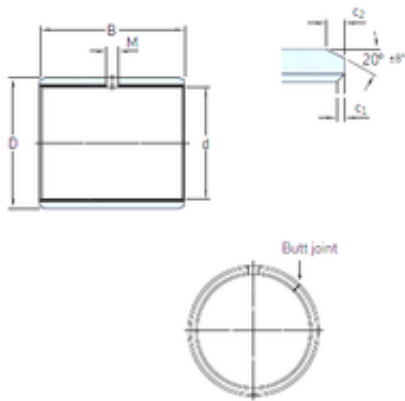

Bearing No. PCZ 1208 E

D	22,225 mm
d	19.05 mm
B	12,7 mm
M	– mm
Weight	0,0098 Kg
c1 min	0,1 mm
c2 min	0,2 mm
Size (mm)	19.05x22.225x12.7
Width (mm)	12,7
Mass bushing	0.0098 kg
? ±8	20 °
Bearing number	PCZ 1208 E
c ₂ max.	1 mm
c ₁ min.	0.1 mm
c ₁ max.	0.7 mm
c ₂ min.	0.2 mm
Bore Diameter (mm)	19.05
Outer Diameter (mm)	22,225
Housing bore range min.	22.217 mm
Housing bore range max.	22.238 mm
Shaft diameter range min.	18.997 mm
Shaft diameter range max.	19.027 mm
Basic dynamic load rating (C)	18,3 kN
Specific dynamic load factor K	80 N/mm ²
Permissible sliding velocity v min.	0 m/s
Permissible sliding	2 m/s

velocity v max.	
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	18.3 kN
Basic static load rating - radial direction C_0	56 kN
Factor depending on material and bearing type K_M	480