


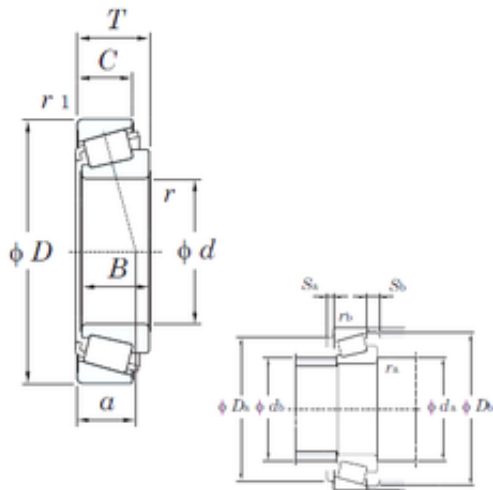

Bearing No. 25572/25520

|                               |                    |
|-------------------------------|--------------------|
| B                             | 25,4 mm            |
| d                             | 38,1 mm            |
| D                             | 82,931 mm          |
| T                             | 23,812 mm          |
| C                             | 19,05 mm           |
| a                             | 17,5 mm            |
| Db                            | 77 mm              |
| Da                            | 74 mm              |
| r min.                        | 0,8 mm             |
| Weight                        | 0,64 Kg            |
| db min                        | 46 mm              |
| da min.                       | 46 mm              |
| r2 min.                       | 0,8 mm             |
| rb max.                       | 0,8 mm             |
| ra max.                       | 0,8 mm             |
| Size (mm)                     | 38.1x82.931x23.812 |
| Width (mm)                    | 23,812             |
| Bearing number                | 25572/25520        |
| Bore Diameter (mm)            | 38,1               |
| Outer Diameter (mm)           | 82,931             |
| Calculation factor (e)        | 0,33               |
| (Oil) Lubrication Speed       | 6300 r/min         |
| Calculation factor (Y0)       | 0,99               |
| (Grease) Lubrication Speed    | 4800 r/min         |
| Basic dynamic load rating (C) | 77,2 kN            |
| Basic static load rating (C0) | 100 kN             |