


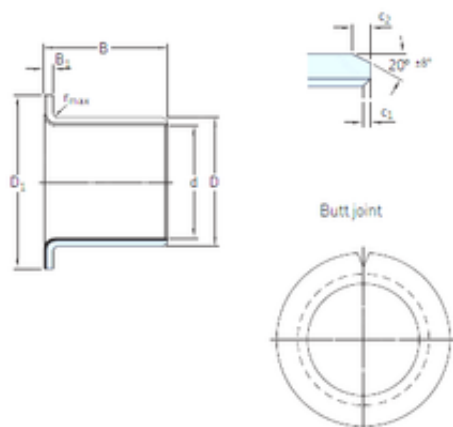

Bearing No. PCMF 252821.5 E

D	28 mm
d	25 mm
B	21,5 mm
B1	1,5 mm
D1	35 mm
r max	1,5 mm
r max.	1.5 mm
c1 min	0,1 mm
c2 min	0,2 mm
Weight	0,025 Kg
Size (mm)	25x28x21.5
Width (mm)	21,5
Mass bushing	0.023 kg
? ±8	20 °
D ₁	35 mm
B ₁	1.5 mm
Bearing number	PCMF 252821.5 E
Tolerance shaft	f7
Tolerance housing	H7
c ₁ min.	0.1 mm
c ₁ max.	0.7 mm
c ₂ min.	0.2 mm
c ₂ max.	1 mm
Bore Diameter (mm)	25
Outer Diameter (mm)	28
Dynamic load rating axial (C)	20,4 kN
Specific dynamic load factor K	80 N/mm ²
Static load rating radial (C0)	116 kN

Dynamic load rating radial (C)	37,5 kN
Permissible sliding velocity v min.	0 m/s
Permissible sliding velocity v max.	2 m/s
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	37.5 kN
Basic dynamic load rating - axial direction C_a	20.4 kN
Basic static load rating - axial direction C_{0a}	64 kN
Basic static load rating - radial direction C_0	116 kN
Factor depending on material and bearing type K_M	480