


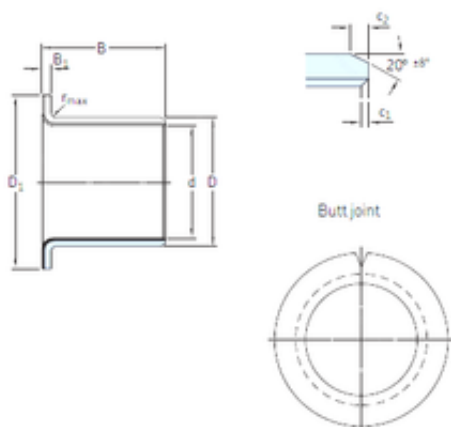

Bearing No. PCMF 121407 E

D	14 mm
d	12 mm
B	7 mm
B1	1 mm
D1	20 mm
r max	1 mm
r max.	1 mm
c1 min	0,1 mm
c2 min	0,2 mm
Weight	0,0036 Kg
Size (mm)	12x14x7
Width (mm)	7
Mass bushing	0.0036 kg
? ±8	20 °
D ₁	20 mm
B ₁	1 mm
Bearing number	PCMF 121407 E
Tolerance shaft	f7
Tolerance housing	H7
c ₁ min.	0.1 mm
c ₁ max.	0.6 mm
c ₂ min.	0.2 mm
c ₂ max.	1 mm
Bore Diameter (mm)	12
Outer Diameter (mm)	14
Dynamic load rating axial (C)	9,15 kN
Specific dynamic load factor K	80 N/mm ²
Static load rating radial (C0)	15 kN

Dynamic load rating radial (C)	4,8 kN
Permissible sliding velocity v min.	0 m/s
Permissible sliding velocity v max.	2 m/s
Coefficient of friction μ min.	0.03
Coefficient of friction μ max.	0.25
Specific static load factor K_0	250 N/mm ²
Basic dynamic load rating - radial direction C	4.8 kN
Basic dynamic load rating - axial direction C_a	9.15 kN
Basic static load rating - axial direction C_{0a}	28.5 kN
Basic static load rating - radial direction C_0	15 kN
Factor depending on material and bearing type K_M	480