


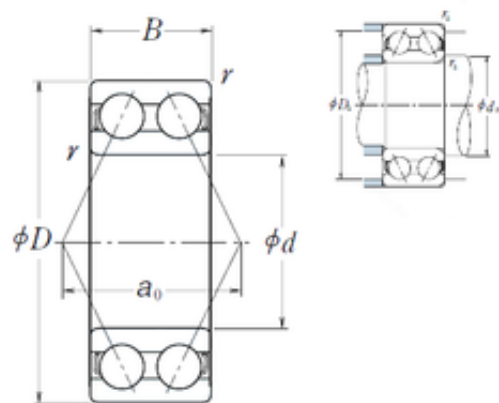

Bearing No. 5200

|        |         |
|--------|---------|
| a      | 14,5 mm |
| r      | 0.6     |
| d      | 10 mm   |
| D      | 30 mm   |
| B      | 14,3 mm |
| C      | 14,3 mm |
| da     | 15      |
| ra     | 0.6     |
| C0     | 3.9     |
| B_     | 14.3    |
| Z_     | 7       |
| D_     | 30      |
| a0     | 14.5    |
| DA_    | 4.762   |
| DE_    | 24.781  |
| ALP    | 50      |
| D_a    | 25      |
| SRE    | 2.48    |
| DI_    | 15.219  |
| SRI    | 2.48    |
| SREN   | 0       |
| SREX   | 0.015   |
| KBRG   | 1121    |
| SDM_   | 20      |
| yobi   | 5200    |
| mass   | 0.05    |
| SRIX   | 0.015   |
| SRIN   | 0       |
| Weight | 0,05 Kg |
| r min. | 0,6 mm  |
|        |         |

|                               |              |
|-------------------------------|--------------|
| da max                        | 25 mm        |
| LangID                        | 1            |
| da min.                       | 15 mm        |
| ra max.                       | 0,6 mm       |
| hidYobi                       | 5200         |
| Oil rpm                       | 22000        |
| GRS rpm                       | 17000        |
| hidTable                      | ecat_NSANGBD |
| Size (mm)                     | 10x30x14.3   |
| Prod_Type3                    | ACBB_DR_A    |
| Width (mm)                    | 14,3         |
| Bearing number                | 5200         |
| Bore Diameter (mm)            | 10           |
| Outer Diameter (mm)           | 30           |
| (Grease) Lubrication Speed    | 17 000 r/min |
| Basic dynamic load rating (C) | 7,15 kN      |
| Basic static load rating (C0) | 3,9 kN       |