


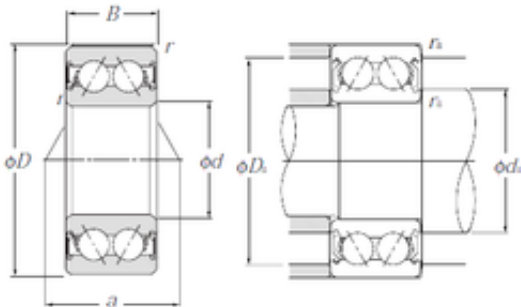

Bearing No. 5200SCLLD

D	30 mm
d	10 mm
B	14,3 mm
C	14,3 mm
a	14,5 mm
Bore	0.394 Inch 10 Millimeter
Noun	Bearing
Width	0.563 Inch 14.3 Millimeter
UNSPSC	31171531
r min.	0,6 mm
da max	15,5 mm
Da max.	26 mm
ra max.	0,6 mm
da min.	14 mm
Category	Angular Contact Ball Bearing
Snap Ring	No
Size (mm)	10x30x14.3
Inventory	0.0
Enclosure	2 Seals
Width (mm)	14,3
Flush Ground	No
Contact Angle	25 Degree
Product Group	B00152
Inch - Metric	Metric
Cage Material	Steel
Other Features	Shell Alvania 2 Prelubricated
Keyword String	Angular Contact

Bearing number	5200SCLLD
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outside Diameter	1.181 Inch 30 Millimeter
Manufacturer URL	http://www.ntnamerica.com
Long Description	10MM Bore; 30MM Outside Diameter; 14.3MM Width; 2 Seals; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 25 Degree; 1 (Single
Weight / Kilogram	0
Manufacturer Name	NTN
Bore Diameter (mm)	10
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Outer Diameter (mm)	30
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Double Row
Basic dynamic load rating (C)	7,15 kN
Basic static load rating (C0)	3,9 kN
Maximum Capacity / Filling Slot	No