


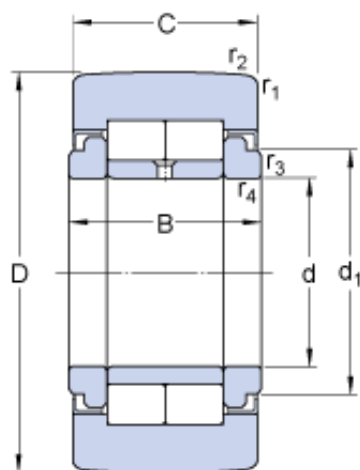

Bearing No. NUTR 25 A

d	25 mm
D	52 mm
C	24 mm
B	25 mm
Bore	0.984 Inch 25 Millimeter
Noun	Bearing
UNSPSC	31171530
series:	NUTR
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Size (mm)	25x52x24
Inventory	0.0
Width (mm)	24
maximum rpm:	3200 rpm
Weight / LBS	0.617
Roller Width	0.945 Inch 24 Millimeter
roller shape:	Crowned
closure type:	Sealed
roller width:	24 mm
d ₁	31 mm
d ₁	31 mm
Product Group	B04144
Inch - Metric	Metric
Relubricatable	Yes
Bearing number	NUTR 25 A
bore diameter:	25 mm
Keyword String	Cam Follower

Limiting speed	3200 r/min
overall width:	25 mm
Other Features	Full Complement With Flanged Inner Ring Labyrinth Seal
Roller Diameter	2.047 Inch 52 Millimeter
Rolling Element	Cylindrical Roller Bearing - Double Row
finish/coating:	Uncoated
Long Description	25MM Bore; 52MM Roller Diameter; 24MM Roller Width; Crowned Roller; Yoke Type; Sealed; Cylindrical Roller Bearing - Double Row; Relubricatable
roller diameter:	52 mm
Manufacturer URL	http://www.skf.com
bearing element:	Cylindrical Rollers
roller material:	Steel
Weight / Kilogram	0.28
Manufacturer Name	SKF
Bore Diameter (mm)	25
Mass support roller	0.28 kg
Outer Diameter (mm)	52
$r_{1,2}$ min.	1 mm
Minimum Buy Quantity	N/A
manufacturer catalog:	Click here
Harmonized Tariff Code	8482.50.00.00
$r_{1,2}$ - min.	1 mm
Roller Surface Profile	Crowned
$r, r_{3,4}$ min.	0.5 mm
manufacturer upc number:	7316571021119
Manufacturer Item	NUTR 25 A

Number	
r, r _{3,4} - min.	0.5 mm
Basic dynamic load rating C	29.7 kN
radial static load capacity:	36 kN
operating temperature range:	300 °F
radial dynamic load capacity:	29.7 kN
Basic dynamic load rating - C	29.7 kN
Fatigue load limit P _u	4.25 kN
Fatigue load limit - P _u	4.2 kN
Basic static load rating C ₀	36 kN
Basic static load rating - C ₀	36 kN
Maximum static radial loads - F _r	18 kN
Maximum static radial loads - F _{0r}	25.5 kN
Maximum dynamic radial loads F _r max.	18 kN
Maximum static radial loads F _{0r} max.	25.5 kN