


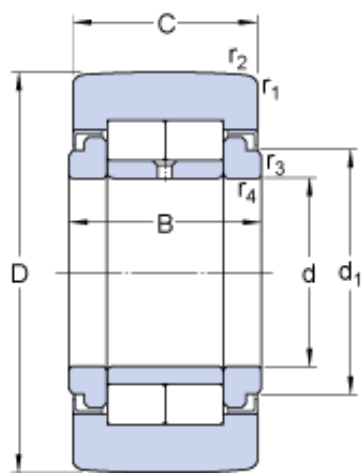

Bearing No. NUTR 35 A

d	35 mm
D	72 mm
C	28 mm
B	29 mm
Noun	Bearing
Bore	1.378 Inch 35 Millimeter
UNSPSC	31171530
Profile	Yoke Type
Category	Cam Followers Yoke Type
Enclosure	Sealed
Inventory	0.0
Size (mm)	35x72x28
Width (mm)	28
Roller Width	1.102 Inch 28 Millimeter
Weight / LBS	1.389
Product Group	B04120
d ₁	44 mm
Inch - Metric	Metric
d ₁	44 mm
Keyword String	Cam Follower
Other Features	Full Complement With Flanged Inner Ring Labyrinth Seal
Relubricatable	Yes
Bearing number	NUTR 35 A
Limiting speed	2000 r/min
Rolling Element	Cylindrical Roller Bearing - Double Row
Roller Diameter	2.835 Inch 72

	Millimeter
Manufacturer URL	http://www.skf.com
Long Description	35MM Bore; 72MM Roller Diameter; 28MM Roller Width; Crowned Roller; Yoke Type; Sealed; Cylindrical Roller Bearing - Double Row; Relubricatable
Weight / Kilogram	0.63
Manufacturer Name	SKF
Bore Diameter (mm)	35
Outer Diameter (mm)	72
Mass support roller	0.63 kg
Minimum Buy Quantity	N/A
$r_{1,2}$ min.	1.1 mm
$r_{1,2}$ - min.	1.1 mm
Harmonized Tariff Code	8482.50.00.00
Roller Surface Profile	Crowned
$r, r_{3,4}$ min.	0.6 mm
Manufacturer Item Number	NUTR 35 A
$r, r_{3,4}$ - min.	0.6 mm
Basic dynamic load rating C	45.7 kN
Basic dynamic load rating - C	45.7 kN
Fatigue load limit P_u	6.95 kN
Fatigue load limit - P_u	7 kN
Basic static load rating C_0	57 kN
Basic static load rating - C_0	57 kN
Maximum static radial loads - F_r	33.5 kN

Maximum static radial loads - F_{0r}	47.5 kN
Maximum dynamic radial loads F_r max.	33.5 kN
Maximum static radial loads F_{0r} max.	47.5 kN