


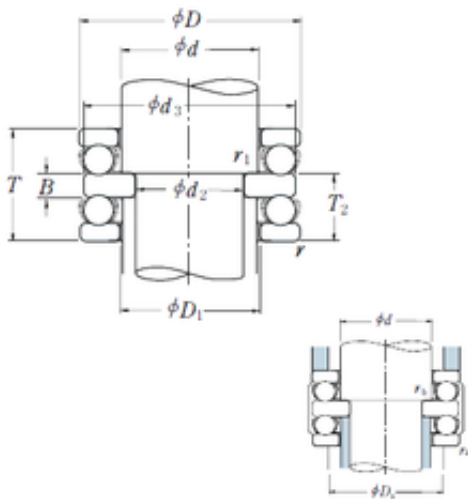

Bearing No. 52206

d	30 mm
D	52 mm
T	29 mm
B	7 mm
D1	32 mm
d2	25 mm
T2	18 mm
d3	52 mm
Noun	Bearing
UNSPSC	31171552
Banded	No
Bore 1	0.984 Inch 25 Millimeter
Height	1.142 Inch 29 Millimeter
Bore 2	1.26 Inch 32 Millimeter
Weight	0,254 Kg
r min.	0,6 mm
Da max.	42 mm
rb max.	0,3 mm
series:	52200
ra max.	0,6 mm
r1 min.	0,3 mm
Category	Thrust Ball Bearings
Size (mm)	30x52x29
Inventory	0.0
race type:	Flat
Width (mm)	29
maximum rpm:	5300 rpm
Weight / LBS	0.55997
Cage Material	Steel

Product Group	B00308
Inch - Metric	Metric
overall width:	29 mm
cage material:	Steel Cage
fillet radius:	.6 mm
Keyword String	Ball Thrust
bore diameter:	25 mm
Bearing number	52206
Other Features	Double Row With Flat Seat
Thrust Bearing	Yes
Rolling Element	Ball Bearing
Precision Class	Non-Precision
Long Description	25MM Bore 1; 32MM Bore 2; 52MM Outside Diameter; 29MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision
Manufacturer URL	http://www.nskamericas.com
Outside Diameter	2.047 Inch 52 Millimeter
Manufacturer Name	NSK
outside diameter:	52 mm
Weight / Kilogram	0.28
precision rating:	ABEC1, P0
Bore Diameter (mm)	30
Outer Diameter (mm)	52
thrust bearing type:	Double-Direction
separable or banded:	Separable
Minimum Buy Quantity	N/A
static load capacity:	13100 lbf
Component Description	Roller Assembly Plus

	Raceways
dynamic load capacity:	6650 lbf
Harmonized Tariff Code	8482.10.50.08
outside diameter design:	Straight
Manufacturer Item Number	52206
Single or Double Direction	Double Direction
(Grease) Lubrication Speed	3200 r/min
operating temperature range:	Maximum of +120 °C
Basic static load rating (C0)	58 kN
Basic dynamic load rating (C)	29,5 kN
Overall Height with Aligning Washer	0 Inch 0 Millimeter