


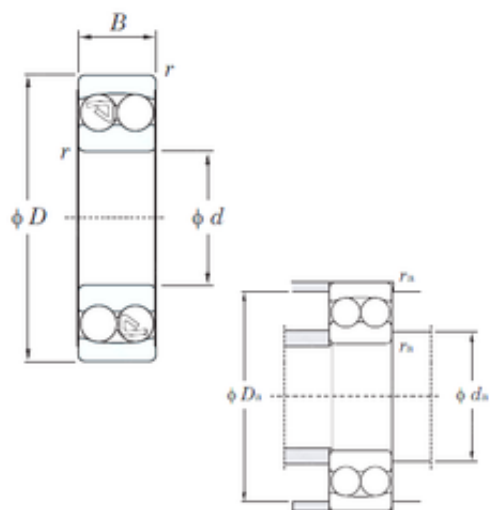

Bearing No. 1206

D	62 mm
d	30 mm
B	16 mm
C	16 mm
e	0.25
Y1	2.55
Y0	2.67
Y2	3.94
Cr	15.6
Cu	0.29
C0r	4.70
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
r(min)	1
UNSPSC	31171532
r min.	1 mm
Weight	0.220 Kg
ra(max)	1
Da(max)	57
da(min)	35
ra max.	1 mm
da min.	35 mm
Da max.	57 mm
Oil lub.	12000
Category	Self Aligning Ball Bearings
Inventory	0.0
Enclosure	Open
Size (mm)	30x62x16
Width (mm)	16

Grease lub.	9900
Bearing No.	1206
Weight / LBS	0.48502
Product Group	B00152
Cage Material	Steel
Inch - Metric	Metric
Other Features	Allowable Misalignment 2.5 Deg
Keyword String	Self Aligning
Bearing number	1206
Precision Class	ABEC 1 ISO P0
Mounting Method	Shaft
Rolling Element	Ball Bearing
(Refer.)Mass(kg)	0.220
Manufacturer URL	http://www.koyousa.com
Inner Race Width	0.63 Inch 16 Millimeter
Outside Diameter	2.441 Inch 62 Millimeter
Outer Race Width	0.63 Inch 16 Millimeter
Long Description	30MM Bore; Shaft Mount; 62MM Outside Diameter; 16MM Inner Race Width; 16MM Outer Race Width; Open; Steel Cage; Double Row of Balls; ABEC 1 ISO P0; C0-Medium
Manufacturer Name	KOYO
Weight / Kilogram	0.238
Bore Diameter (mm)	30
Internal Clearance	C0-Medium
Outer Diameter (mm)	62
Minimum Buy Quantity	N/A
Calculation factor (e)	0.25

Harmonized Tariff Code	8482.10.50.68
Calculation factor (Y1)	2.55
Calculation factor (Y0)	2.67
(Oil) Lubrication Speed	12000 r/min
Number of Rows of Balls	Double Row
Manufacturer Item Number	1206
(Grease) Lubrication Speed	9900 r/min
Basic static load rating (C0)	4.65 kN
Basic dynamic load rating (C)	15.6 kN