


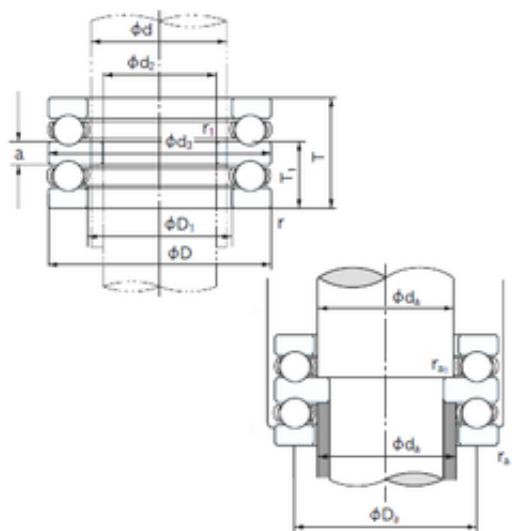

Bearing No. 52208

|              |                               |
|--------------|-------------------------------|
| d            | 40 mm                         |
| D            | 68 mm                         |
| T            | 36 mm                         |
| a            | 9 mm                          |
| d3           | 68 mm                         |
| D1           | 42 mm                         |
| d2           | 30 mm                         |
| T1           | 22.5 mm                       |
| D3           | 72 mm                         |
| D2           | 55 mm                         |
| Noun         | Bearing                       |
| Banded       | No                            |
| UNSPSC       | 31171552                      |
| Weight       | 0.540 Kg                      |
| Height       | 1.417 Inch   36<br>Millimeter |
| r min.       | 1 mm                          |
| Bore 2       | 1.654 Inch   42<br>Millimeter |
| Bore 1       | 1.181 Inch   30<br>Millimeter |
| r1 min.      | 0.6 mm                        |
| da min.      | 40 mm                         |
| Da max.      | 51 mm                         |
| ra max.      | 1 mm                          |
| Category     | Thrust Ball Bearings          |
| ra1 max.     | 0.6 mm                        |
| Size (mm)    | 40x68x36                      |
| Inventory    | 0.0                           |
| Width (mm)   | 36                            |
| Weight / LBS | 1.1905                        |
|              |                               |

| Inch - Metric                 | Metric                                                                                                                              |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------|
| Product Group                 | B00234                                                                                                                              |
| Cage Material                 | Steel                                                                                                                               |
| Bearing number                | 52208                                                                                                                               |
| Thrust Bearing                | Yes                                                                                                                                 |
| Keyword String                | Ball Thrust                                                                                                                         |
| Other Features                | Double Row   With Flat Seat                                                                                                         |
| Rolling Element               | Ball Bearing                                                                                                                        |
| Precision Class               | Non-Precision                                                                                                                       |
| Outside Diameter              | 2.677 Inch   68 Millimeter                                                                                                          |
| Manufacturer URL              | <a href="http://www.nachi.com">http://www.nachi.com</a>                                                                             |
| Long Description              | 30MM Bore 1; 42MM Bore 2; 68MM Outside Diameter; 36MM Height; Ball Bearing; Double Direction; Not Banded; Steel Cage; Non-Precision |
| Weight / Kilogram             | 0                                                                                                                                   |
| Manufacturer Name             | NACHI                                                                                                                               |
| Bore Diameter (mm)            | 40                                                                                                                                  |
| Outer Diameter (mm)           | 68                                                                                                                                  |
| Minimum Buy Quantity          | N/A                                                                                                                                 |
| Component Description         | Roller Assembly Plus Raceways                                                                                                       |
| Harmonized Tariff Code        | 8482.10.50.08                                                                                                                       |
| Single or Double Direction    | Double Direction                                                                                                                    |
| (Grease) Lubrication Speed    | 2700 r/min                                                                                                                          |
| Basic dynamic load rating (C) | 47 kN                                                                                                                               |
| Basic static load rating (C0) | 98,5 kN                                                                                                                             |
|                               |                                                                                                                                     |

|                                        |                       |
|----------------------------------------|-----------------------|
| Overall Height with<br>Aligning Washer | 0 Inch   0 Millimeter |
|----------------------------------------|-----------------------|