


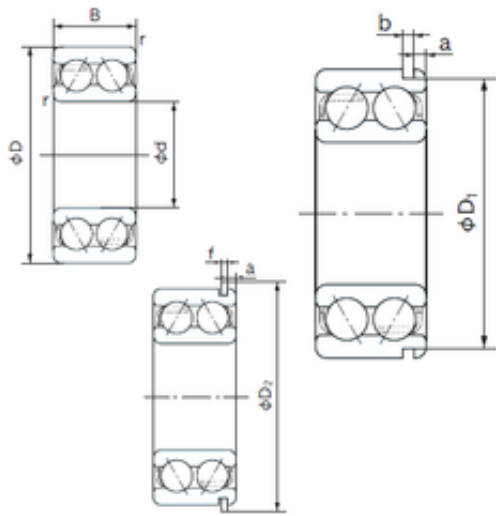

Bearing No. 5203ANR

b	1.35 mm
f	1.12 mm
d	17 mm
D	40 mm
B	17.5 mm
C	17.5 mm
a	2.06 mm
da	22 mm
D2	44.6 mm
D1	38.1 mm
Cy	2.9 mm
Da	35 mm
Dx	45.5 mm
ra	0.6 mm
Width	17.5 mm
r min.	0.6 mm
Weight	0.090 Kg
a (max)	2.1 mm
Bore Type	Cylindrical Bore
Bore Size	17 mm
Enclosure	Snap Ring Groove with Snap Ring
Size (mm)	17x40x17.5
Width (mm)	17.5
Configuration	Double Row
Bearing number	5203ANR
Snap Ring Width	1.1 mm
Radial Clearance	0.003 to 0.018 mm
Outside Diameter	40 mm
Bore Diameter (mm)	17

Static Load Rating	8,800 N
Dynamic Load Rating	14,200 N
Outer Diameter (mm)	40
Limiting Speed - Oil	15,000 rpm
Fillet Radius/Chamfer	0.6 mm
Limiting Speed - Grease	11,000 rpm
Snap Ring Outside Diameter	44.6 mm
(Grease) Lubrication Speed	11000 r/min
Basic static load rating (C0)	8,8 kN
Basic dynamic load rating (C)	14,2 kN