


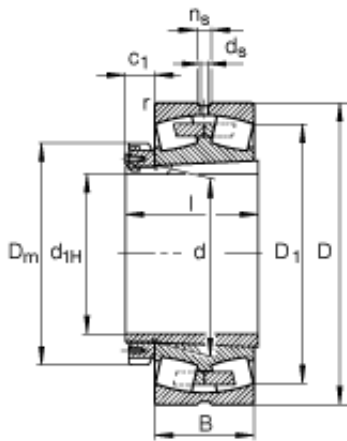

Bearing No. 23976-K-MB + H3976-HG

d	380 mm
l	164 mm
D	520 mm
B	106 mm
c	48 mm
m	66,3 kg / Weight
e	0,19
Size (mm)	360x520x106
Width (mm)	106
n_B	265000 N / Fatigue limit load, radial
C_r	1760000 N / Dynamic load rating (radial)
n_s	17,7 mm
d_s	9,5 mm
D_1	477,6 mm
D_m	450 mm
Y_1	3,58
c_1	62 mm
Y_2	5,33
Y_0	3,5
n_G	1340 1/min / Limiting speed
m_1	32,1 kg
C_{0r}	4000000 N / Static load rating (radial)
Bearing number	23976-K-MB + H3976-HG
d_{1H}	360 mm
r_{min}	4 mm

$r_{a \max}$	3 mm
$d_{a \max}$	415 mm
$D_{a \max}$	505,4 mm
$B_{a \min}$	15 mm
$d_{b \min}$	393 mm
Bore Diameter (mm)	360
Outer Diameter (mm)	520
- H3976-HG / Adapter sleeve	H3976HG / Adapter sleeve