


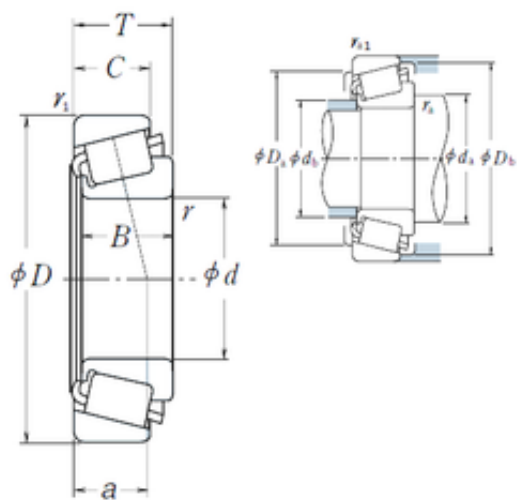

Bearing No. 25878/25820

e	0.29
d	34,925 mm
D	73,025 mm
T	23,812 mm
B	24,608 mm
C	19,05 mm
a	15,7 mm
Da	64 mm
B_	24.608
Db	68 mm
da	47 mm
Y0	1.1
db	40,5 mm
C0	86
D_	73.025
Z_	16
C_	19.05
Y1	2.1
DE_	62.456
SLR	18
D_a	64
DI_	45.213
DA1	9.237
DA2	8.283
CUP	0.165
DA_	8.762
D_b	68
RAr	173.558
SDM_	53.895
KBRG	3161

yobi	25878/25820
CONE	0.304
ALP21	21
ALP22	54
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	3
r min.	3,5 mm
LangID	1
Weight	0,469 Kg
ALPHA_	10.95
r1 min.	2,3 mm
ra max.	3,5 mm
Oil rpm	7100
outer r	2.3
hidYobi	25878/25820
GRS rpm	5300
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	2.3
ra1 max.	2,3 mm
Size (mm)	34.925x73.025x23.812
SHOG_yobi	25878R/25820R
Prod_Type3	TRBSR_ID_A
Width (mm)	23,812
Bearing number	25878/25820
Bore Diameter (mm)	34,925
Outer Diameter (mm)	73,025
Calculation factor (e)	0,29

(Oil) Lubrication Speed	7100 r/min
Calculation factor (Y0)	1,1
(Grease) Lubrication Speed	5300 r/min
Basic static load rating (C0)	86 kN
Basic dynamic load rating (C)	71 kN