


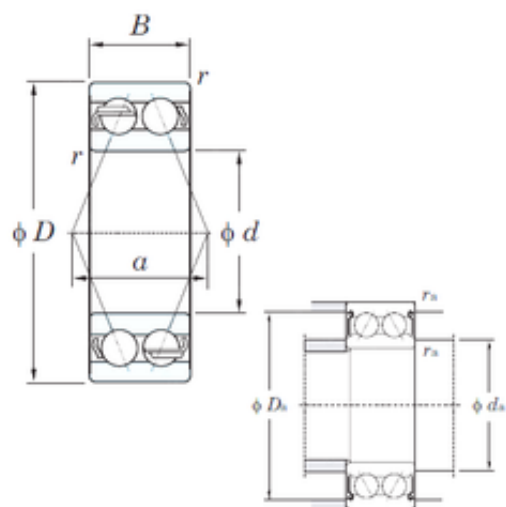

Bearing No. 5204

D	47 mm
d	20 mm
B	20.6 mm
C	20.6 mm
a	23.5 mm
Cu	0.640
Cr	24.6
C0r	12.5
Noun	Bearing
Bore	0.787 Inch 20 Millimeter
Width	0.811 Inch 20.6 Millimeter
Weight	0.120 Kg
r(min)	1
UNSPSC	31171531
da max	26.6 mm
r min.	1 mm
ra max.	1 mm
Da max.	41.5 mm
da(max)	-
da(min)	25.5
Da(max)	41.5
ra(max)	1
da min.	25.5 mm
Category	Angular Contact Ball Bearing
Oil lub.	12000
Enclosure	Open
Inventory	0.0
Size (mm)	20x47x20.6

Snap Ring	No
Width (mm)	20.6
Grease lub.	8800
Bearing No.	5204
Flush Ground	No
Product Group	B00152
Cage Material	Steel
Contact Angle	24 Degree
Inch - Metric	Metric
Keyword String	Angular Contact
Bearing number	5204
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
(Refer.)Mass(kg)	0.158
Manufacturer URL	http://www.koyousa.com
Outside Diameter	1.85 Inch 47 Millimeter
Long Description	20MM Bore; 47MM Outside Diameter; 20.6MM Width; Open; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; C0-Medium; Steel Cage; 24 Degree; 1 (Single)
Manufacturer Name	KOYO
Weight / Kilogram	0.13
Internal Clearance	C0-Medium
Number of Bearings	1 (Single)
Bore Diameter (mm)	20
Outer Diameter (mm)	47
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Double Row

(Grease) Lubrication Speed	8800 r/min
Basic static load rating (C0)	12.5 kN
Basic dynamic load rating (C)	19.7 kN
Maximum Capacity / Filling Slot	No