


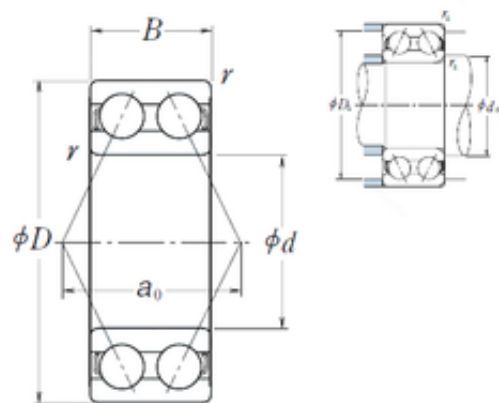

Bearing No. 5204

a	24,3 mm
r	1
d	20 mm
D	47 mm
B	20,6 mm
C	20,6 mm
C0	12.4
B_	20.6
D_	47
Z_	8
ao	24.3
ra	1
da	26
DI_	25.532
DE_	41.468
D_a	41
SRI	4.13
DA_	7.938
SRE	4.13
ALP	50
SDM_	33.5
mass	0.12
SREN	0
KBRG	1121
SRIN	0
SRIX	0.02
SREX	0.02
yobi	5204
r min.	1 mm
Weight	0,12 Kg

da max	41 mm
LangID	1
Oil rpm	13000
hidYobi	5204
da min.	26 mm
GRS rpm	10000
series:	5200
ra max.	1 mm
hidTable	ecat_NSANGBD
Size (mm)	20x47x20.6
Width (mm)	20,6
bore type:	Round
Prod_Type3	ACBB_DR_A
maximum rpm:	13000 rpm
closure type:	Open
Bearing number	5204
bore diameter:	20 mm
contact angle:	25 °
cage material:	Steel Cage
overall width:	0.8111 in
fillet radius:	1 mm
finish/coating:	Uncoated
precision rating:	ABEC1, P0
outside diameter:	47 mm
Bore Diameter (mm)	20
Outer Diameter (mm)	47
snap ring included:	Without Snap Ring
internal clearance:	C0
maximum temperature:	120 °C
row type & fill slot:	Double-Row Non-Fill Slot
(Grease) Lubrication Speed	10 000 r/min

radial dynamic load capacity:	19600 N
Basic static load rating (C0)	12,4 kN
Basic dynamic load rating (C)	19,6 kN