


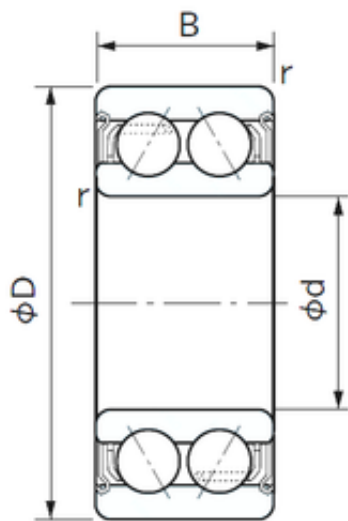

Bearing No. 5204ZZ

D	47 mm
d	20 mm
B	20.6 mm
C	20.6 mm
ra	1 mm
Da	41 mm
da	26 mm
Noun	Bearing
Bore	0.787 Inch 20 Millimeter
Width	0.811 Inch 20.6 Millimeter
UNSPSC	31171531
r min.	1 mm
Weight	0.120 Kg
Category	Angular Contact Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	20x47x20.6
Inventory	28.0
Snap Ring	No
Bore Type	Cylindrical Bore
Bore Size	20 mm
Width (mm)	20.6
Weight / LBS	0.26
Flush Ground	No
Inch - Metric	Metric
Contact Angle	20 Degree
Configuration	Double Row
Cage Material	Steel
Product Group	B00152

Bearing number	5204ZZ
Keyword String	Angular Contact
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Long Description	20MM Bore; 47MM Outside Diameter; 20.6MM Width; 2 Metal Shields; No Flush Ground; Ball Bearing; Double Row of Balls; ABEC 1 ISO P0; No Filling Slot; No Snap Ring
Manufacturer URL	http://www.nachi.com
Radial Clearance	0.005 to 0.020 mm
Outside Diameter	1.85 Inch 47 Millimeter
Weight / Kilogram	0.118
Manufacturer Name	NACHI
Number of Bearings	1 (Single)
Bore Diameter (mm)	20
Internal Clearance	C0-Medium
Static Load Rating	12,700 N
Outer Diameter (mm)	47
Dynamic Load Rating	20,000 N
Limiting Speed - Oil	10,000 rpm
Minimum Buy Quantity	N/A
Fillet Radius/Chamfer	1 mm
Harmonized Tariff Code	8482.10.50.28
Number of Rows of Balls	Double Row
Manufacturer Item Number	5204 ZZ BV2S
(Grease) Lubrication Speed	10000 r/min
Basic dynamic load rating (C)	20 kN
Basic static load rating	12,7 kN

(C0)	
Maximum Capacity / Filling Slot	No