


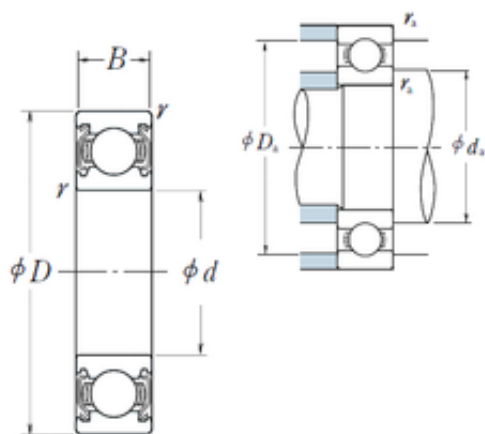

Bearing No. 60/22ZZ

D	44 mm
d	22 mm
B	12 mm
C	12 mm
r	0.6
Z_	9
B_	12
D_	44
ra	0.6
C0	5.05
fo	14
DI_	25.45
SRI	3.21
D_a	40
DE_	38.15
DA_	6.35
SRE	3.37
SRIN	0
SBRG	10
yobi	60/22ZZ
SDM_	31.8
SREX	0.04
KBRG	6141
bomp	0
mass	0.074
Bore	0.866 Inch 22 Millimeter
SRIX	0.02
SREN	0
Noun	Bearing

ALPHA_	0
da min	26
LangID	1
r min.	0,6 mm
UNSPSC	31171504
C_conv	9400
da max	26,5 mm
Weight	0,074 Kg
hidYobi	60/22ZZ
Da max.	40 mm
da min.	26 mm
ra max.	0,6 mm
GRS rpm	17000
hidTable	ecat_NSRDGB
Category	Single Row Ball Bearing
Inventory	0.0
Enclosure	2 Metal Shields
Snap Ring	No
Size (mm)	22x44x12
Width (mm)	12
Prod_Type3	DGBB_SR_ZZ
Weight / LBS	0.1632
Cage Material	Steel
Product Group	B00308
Inch - Metric	Metric
Bearing number	60/22ZZ
Keyword String	Ball
Other Features	Deep Groove
Precision Class	ABEC 1 ISO P0
Rolling Element	Ball Bearing
Outer Race Width	0.472 Inch 12 Millimeter
Outside Diameter	1.732 Inch 44

	Millimeter
Long Description	22MM Bore; 44MM Outside Diameter; 12MM Outer Race Width; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Stee
Manufacturer URL	http://www.nskamericas.com
Inner Race Width	0 Inch 0 Millimeter
Weight / Kilogram	0.073
Manufacturer Name	NSK
Internal Clearance	C0-Medium
Bore Diameter (mm)	22
Outer Diameter (mm)	44
Minimum Buy Quantity	N/A
Harmonized Tariff Code	8482.10.50.68
Internal Special Features	No
(Grease) Lubrication Speed	17 000 r/min
Basic static load rating (C0)	5,05 kN
Basic dynamic load rating (C)	9,4 kN
Maximum Capacity / Filling Slot	No