


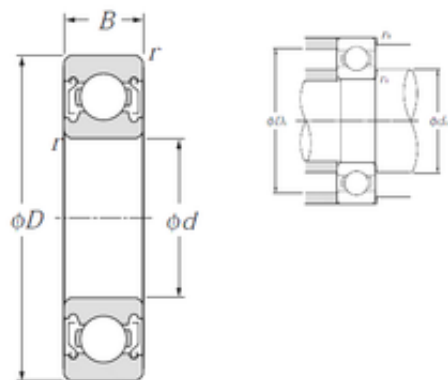

Bearing No. 60/22ZZ

D	44 mm
d	22 mm
B	12 mm
C	12 mm
rn	0,5 mm
Bore	0.866 Inch 22 Millimeter
Noun	Bearing
Weight	0,074 Kg
r min.	0,6 mm
UNSPSC	31171504
da max	26,5 mm
da min.	26 mm
Da max.	40 mm
ra max.	0,6 mm
series:	60
Category	Single Row Ball Bearing
Enclosure	2 Metal Shields
Size (mm)	22x44x12
Inventory	0.0
Snap Ring	No
Width (mm)	12
bore type:	Round
maximum rpm:	20000 RPM
Weight / LBS	0.163
Cage Material	Steel
Inch - Metric	Metric
Product Group	B00308
closure type:	Double Shielded
bore diameter:	22 mm

Keyword String	Ball
overall width:	12 mm
cage material:	Steel
fillet radius:	0.6 mm
Bearing number	60/22ZZ
Rolling Element	Ball Bearing
finish/coating:	Uncoated
Precision Class	ABEC 1 ISO P0
Long Description	22MM Bore; 44MM Outside Diameter; 12MM Outer Race Diameter; 2 Metal Shields; Ball Bearing; ABEC 1 ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features
Manufacturer URL	http://www.ntnamerica.com
Outside Diameter	1.732 Inch 44 Millimeter
Outer Race Width	0.472 Inch 12 Millimeter
outside diameter:	44 mm
outer ring width:	12 mm
inner ring width:	12 mm
Manufacturer Name	NTN
bearing material:	High Carbon Chrome Steel
Weight / Kilogram	0.075
precision rating:	ISO Class 0
Internal Clearance	C0-Medium
Bore Diameter (mm)	22
Outer Diameter (mm)	44
internal clearance:	CN
snap ring included:	Without Snap Ring

Minimum Buy Quantity	N/A
maximum rpm (grease):	17000 rpm
static load capacity:	5050 N
row type & fill slot:	Single Row Non-Fill Slot
dynamic load capacity:	9400 N
Harmonized Tariff Code	8482.10.50.68
Manufacturer Item Number	60/22ZZ/2A
Internal Special Features	No
(Grease) Lubrication Speed	17 000 r/min
manufacturer product page:	Click here
operating temperature range:	-40 to 120 °C
Basic dynamic load rating (C)	9,4 kN
Basic static load rating (C0)	5,05 kN
Maximum Capacity / Filling Slot	No