


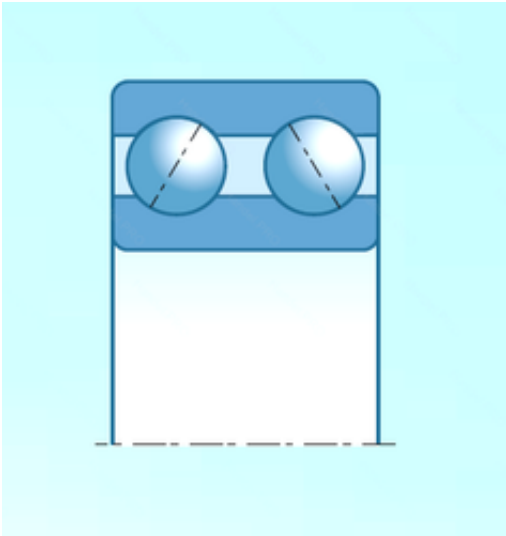

Bearing No. 5206NRZZG15

C	23,800 mm
a	31.4 mm
f	1.65 mm
d	30,000 mm
D	62,000 mm
B	23,800 mm
f0	14.3
d1	40 mm
D1	55.7 mm
Nlim	8,500 rpm
Mass	0.26 kg
Nref	8,500 rpm
a min	3.07 mm
a max	3.28 mm
b min	1.9 mm
b max	2.2 mm
da max	40 mm
da min	35 mm
Da max	57 mm
Ca min	4.67 mm
Db min	68.4 mm
D4 max	67.7 mm
r0 max	0.6 mm
D3 max	62 mm
Ca max	4.98 mm
ra max	1 mm
rs min	1 mm
rNs min	0.6 mm
rNa max	0.6 mm
Size (mm)	30x62x23.800

Width (mm)	23,800
Bearing number	5206NRZZG15
Dynamic load, C	28.1 kN
Static load, C0	21.1 kN
Precision class	P0
Contact angle ?	25 °
Bore Diameter (mm)	30,000
Outer Diameter (mm)	62,000
Snap ring reference	R 62
Fatigue limit load, Cu	1.32 kN
Radial clearance class	CN
Min operating temperature, Tmin	-20 °C
Max operating temperature, Tmax	120 °C
Characteristic cage frequency, FTF	0.41 Hz
Characteristic outer ring frequency, BPF0	3.66 Hz
Characteristic inner ring frequency, BPFI	5.34 Hz
Characteristic rolling element frequency, BSF	4.66 Hz