


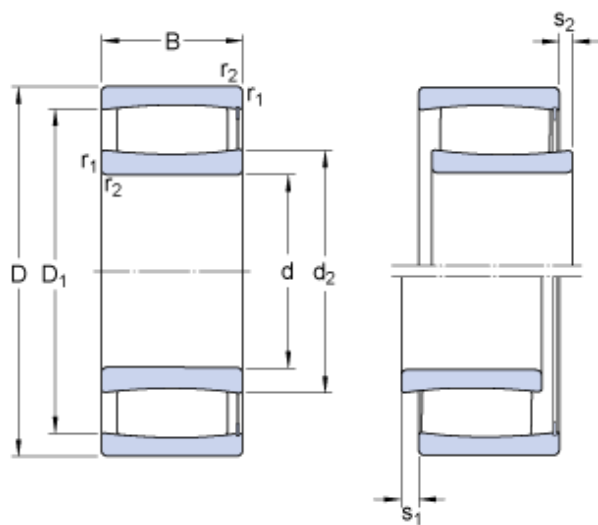

Bearing No. C 2206 V

|                     |            |
|---------------------|------------|
| D                   | 62 mm      |
| d                   | 30 mm      |
| B                   | 20 mm      |
| Category            | Bearings   |
| Inventory           | 0.0        |
| Size (mm)           | 62x30x20   |
| Width (mm)          | 20         |
| Mass bearing        | 0.29 kg    |
| Product Group       | B04144     |
| $d_2$               | 37.4 mm    |
| $D_1$               | 53.1 mm    |
| $s_1$               | 4.5 mm     |
| $s_2$               | 1.5 mm     |
| Limiting speed      | 6000 r/min |
| Bearing number      | C 2206 V   |
| Weight / Kilogram   | 0          |
| Manufacturer Name   | SKF        |
| $s_1$ max.          | 4.5 mm     |
| $r_a$ max.          | 1 mm       |
| $D_a$ max.          | 56.4 mm    |
| $d_a$ max.          | 49 mm      |
| $d_a$ min.          | 35.6 mm    |
| Bore Diameter (mm)  | 62         |
| $s_2$ max.          | 1.5 mm     |
| Outer Diameter (mm) | 30         |
| $D_a$ - max.        | 56.4 mm    |
| $d_a$ - max.        | 49 mm      |
| $d_a$ - min.        | 35.6 mm    |
| $r_{1,2}$ min.      | 1 mm       |
|                     |            |

|                                  |         |
|----------------------------------|---------|
| Minimum Buy Quantity             | N/A     |
| $r_a$ - max.                     | 1 mm    |
| $d_2$ ?                          | 37.4 mm |
| $D_1$ ?                          | 53.1 mm |
| $r_{1,2}$ - min.                 | 1 mm    |
| Factor - $k_1$                   | 0.101   |
| Factor - $k_2$                   | 0.111   |
| Basic dynamic load rating C      | 76.5 kN |
| Basic dynamic load rating - C    | 76.5 kN |
| Fatigue load limit $P_u$         | 8.3 kN  |
| Misalignment factor $k_1$        | 0.101   |
| Fatigue load limit - $P_u$       | 8.3 kN  |
| Basic static load rating $C_0$   | 71 kN   |
| Basic static load rating - $C_0$ | 71 kN   |
| Operating clearance factor $k_2$ | 0.111   |