


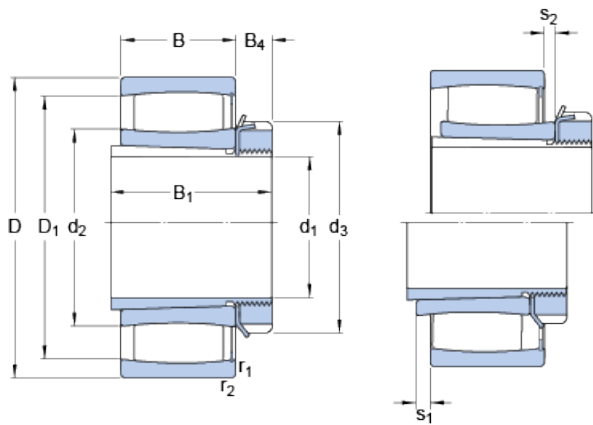

Bearing No. C 2215 KV + H 315

D	130 mm
B	31 mm
Size (mm)	130x65x55
Width (mm)	55
B ₄	14.5 mm
d ₁	65 mm
s ₂	5.3 mm
s ₁	9.6 mm
B ₄	14.5 mm
d ₂	88.5 mm
D ₁	116 mm
d ₃	98 mm
B ₁	55 mm
d ₁	65 mm
B ₁	55 mm
d ₃	98 mm
Limiting speed	2200 r/min
Bearing number	C 2215 KV + H 315
B _a min.	12 mm
D _a max.	121 mm
s ₁ max.	9.6 mm
d _b min.	80 mm
d _a max.	107 mm
r _a max.	1.5 mm
Bore Diameter (mm)	130
s ₂ max.	5.3 mm
Outer Diameter (mm)	65
D _a - max.	121 mm
B _a - min.	12 mm

r_a - max.	1.5 mm
d_b - min.	80 mm
$r_{1,2}$ min.	1.5 mm
d_a - max.	107 mm
Mass bearing + sleeve	2.4 kg
D_1 ?	116 mm
d_2 ?	88.5 mm
Factor - k_2	0.127
Factor - k_1	0.099
$r_{1,2}$ - min.	1.5 mm
Basic dynamic load rating C	220 kN
Basic dynamic load rating - C	220 kN
Fatigue load limit P_u	28 kN
Misalignment factor k_1	0.099
Fatigue load limit - P_u	28 kN
Basic static load rating C_0	240 kN
Basic static load rating - C_0	240 kN
Operating clearance factor k_2	0.127