


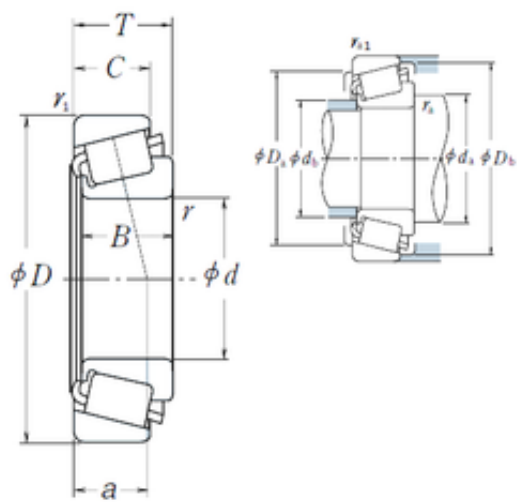

Bearing No. L45449/L45410

e	0.37
d	29 mm
D	50,292 mm
T	14,224 mm
B	14,732 mm
C	10,668 mm
a	10,8 mm
Da	44,5 mm
B_	14.732
Db	48 mm
da	39,5 mm
Y0	0.89
db	33 mm
C0	34
D_	50.292
Z_	21
C_	10.668
Y1	1.6
DE_	44.382
SLR	10
D_a	44.5
DI_	35.103
DA1	4.976
DA2	4.469
CUP	0.036
DA_	4.724
D_b	48
RAr	97.778
SDM_	39.766
KBRG	3161

yobi	L45449/L45410
CONE	0.079
ALP21	27
ALP22	40
ALP23	0
BETA_	1
BET21	2
BET23	0
BET22	55
r min.	3,5 mm
LangID	1
Weight	0,115 Kg
ALPHA_	13.833
r1 min.	1,3 mm
ra max.	3,5 mm
Oil rpm	9500
outer r	1.3
hidYobi	L45449/L45410
GRS rpm	7100
inner r	3.5
hidTable	ecat_NSTPRI
inner ra	3.5
outer rb	1.3
ra1 max.	1,3 mm
Size (mm)	29x50.292x14.224
SHOG_yobi	L45449R/L45410R
Prod_Type3	TRBSR_ID_A
Width (mm)	14,224
Bearing number	L45449/L45410
Bore Diameter (mm)	29
Outer Diameter (mm)	50,292
Calculation factor (e)	0,37

(Oil) Lubrication Speed	9500 r/min
Calculation factor (Y0)	0,89
(Grease) Lubrication Speed	7100 r/min
Basic static load rating (C0)	34 kN
Basic dynamic load rating (C)	26,8 kN