


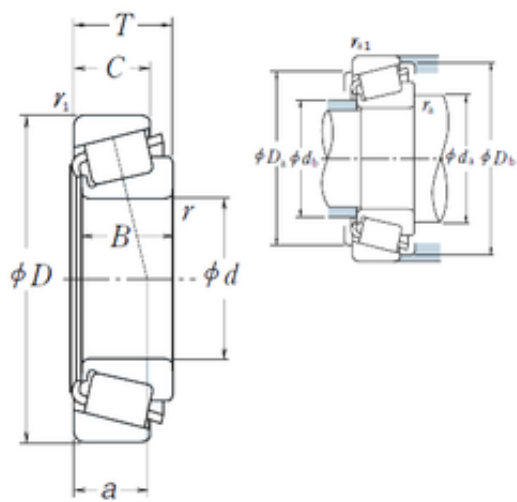

Bearing No. L44640/L44610

e	0.37
d	23,812 mm
D	50,292 mm
T	14,224 mm
B	14,732 mm
C	10,668 mm
a	10,9 mm
Da	44,5 mm
B_	14.732
Db	47 mm
da	30,5 mm
Y0	0.88
db	28,5 mm
C0	32
D_	50.292
Z_	19
C_	10.668
Y1	1.6
DE_	43.847
SLR	9.3
D_a	44.5
DI_	33.228
DA1	5.712
DA2	5.157
CUP	0.039
DA_	5.436
D_b	47
RAr	95.34
SDM_	38.588
KBRG	3161

yobi	L44640/L44610
CONE	0.097
ALP21	28
ALP22	0
ALP23	0
BETA_	1
BET21	3
BET23	0
BET22	26
r min.	1,5 mm
LangID	1
Weight	0,136 Kg
ALPHA_	14
r1 min.	1,3 mm
ra max.	1,5 mm
Oil rpm	10000
outer r	1.3
hidYobi	L44640/L44610
GRS rpm	7100
inner r	1.5
hidTable	ecat_NSTPRI
inner ra	1.5
outer rb	1.3
ra1 max.	1,3 mm
Size (mm)	23.812x50.292x14.224
SHOG_yobi	L44640R/L44610R
Prod_Type3	TRBSR_ID_A
Width (mm)	14,224
Bearing number	L44640/L44610
Bore Diameter (mm)	23,812
Outer Diameter (mm)	50,292
Calculation factor (e)	0,37

(Oil) Lubrication Speed	10000 r/min
Calculation factor (Y0)	0,88
(Grease) Lubrication Speed	7100 r/min
Basic static load rating (C0)	32 kN
Basic dynamic load rating (C)	27,6 kN