


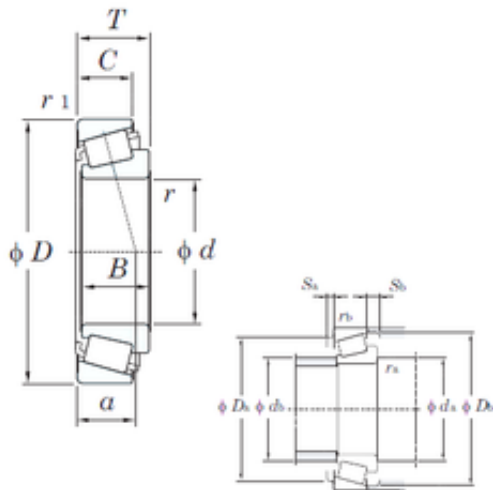

Bearing No. L44640R/L44610

|                               |                      |
|-------------------------------|----------------------|
| B                             | 14,732 mm            |
| d                             | 23,812 mm            |
| D                             | 50,292 mm            |
| T                             | 14,224 mm            |
| C                             | 10,668 mm            |
| a                             | 10,8 mm              |
| Db                            | 47 mm                |
| Da                            | 44,5 mm              |
| r min.                        | 1,6 mm               |
| Weight                        | 0,133 Kg             |
| db min                        | 28,5 mm              |
| da min.                       | 30,5 mm              |
| r2 min.                       | 1,2 mm               |
| rb max.                       | 1,2 mm               |
| ra max.                       | 1,6 mm               |
| Size (mm)                     | 23.812x50.292x14.224 |
| Width (mm)                    | 14,224               |
| Bearing number                | L44640R/L44610       |
| Bore Diameter (mm)            | 23,812               |
| Outer Diameter (mm)           | 50,292               |
| Calculation factor (e)        | 0,37                 |
| (Oil) Lubrication Speed       | 10000 r/min          |
| Calculation factor (Y0)       | 0,88                 |
| (Grease) Lubrication Speed    | 7800 r/min           |
| Basic dynamic load rating (C) | 31,2 kN              |
| Basic static load rating (C0) | 37 kN                |