




Bearing No. RCJTA30-N

d	30 mm
V	80 mm
U	44 mm
A	29 mm
H	142 mm
J	116,5 mm
L	80 mm
N	11,5 mm
A2	20 mm
d3	45 mm
A1	12 mm
B1	32 mm
Bore	1.181 Inch 30 Millimeter
Noun	Bearing
Seals	Double Land Riding Rubber Contact
Weight	0,77 Kg
UNSPSC	31171501
Category	Flange Block
Inventory	0.0
Thread (Q)	Rp1/8
Bolt Spacing	4.587 Inch 116.5 Millimeter
Weight / LBS	1.698
Product Group	M06110
Inch - Metric	Metric
Housing Style	2 Bolt Flange Block
Relubricatable	Yes
Keyword String	Flanged
Other Features	Single Row End Cap

Bearing number	RCJTA30-N
Mounting Bolts	11.5 Millimeter
Rolling Element	Ball Bearing
Mounting Method	Adapter Sleeve
Housing Material	Cast Iron
Long Description	2 Bolt Flange Block; 30MM Bore; 117MM Bolt Circle; 116.5MM Bolt Spacing; 1 Piece Solid; Adapter Sleeve Mount; Cast Iron; Ball Bearing; 32MM Length Thru Bore; Relubricatable; Double Land Riding Rubber
Manufacturer URL	http://www.ina.com
Length Thru Bore	1.26 Inch 32 Millimeter
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	0.922
Insert Part Number	GSH30-2RSRB
Bore Diameter (mm)	30
Pilot Configuration	No Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0 Inch 0 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Manufacturer Item Number	RCJTA30N
Cartridge Pilot Diameter	0 Inch 0 Millimeter
Expansion / Non-expansion	Non-expansion
Basic dynamic load rating (C)	18,9 kN
Nominal Bolt Circle	4.6 Inch 117 Millimeter

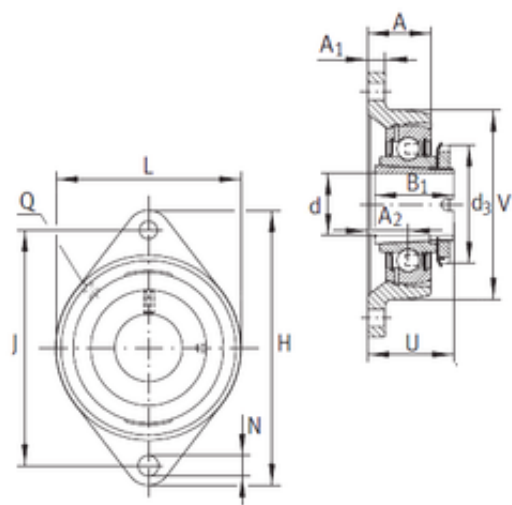

Diameter Round	
----------------	--