


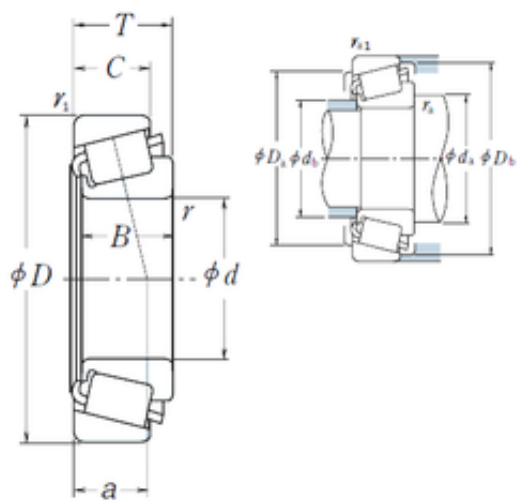

Bearing No. L327249/L327210

e	0.35
d	133,35 mm
D	177,008 mm
T	25,4 mm
B	26,195 mm
C	20,638 mm
a	29,5 mm
Da	167 mm
B_	26.195
Db	171 mm
da	143 mm
Y0	0.95
db	141 mm
C0	258
D_	177.008
Z_	43
C_	20.638
Y1	1.7
DE_	164.248
SLR	18.5
D_a	167
DI_	147.688
DA1	8.692
DA2	8.263
CUP	0.55
DA_	8.478
D_b	171
RAr	373.541
SDM_	156.038
KBRG	3161

yobi	L327249/L327210
CONE	1.18
ALP21	26
ALP22	4
ALP23	0
BETA_	0
BET21	1
BET23	0
BET22	20
r min.	1,5 mm
LangID	1
Weight	1,73 Kg
ALPHA_	13.033
r1 min.	1,5 mm
ra max.	1,5 mm
Oil rpm	2400
outer r	1.5
hidYobi	L327249/L327210
GRS rpm	1800
inner r	1.5
hidTable	ecat_NSTPRI
inner ra	1.5
outer rb	1.5
ra1 max.	1,5 mm
Size (mm)	133.35x177.008x25.4
SHOG_yobi	L327249R/L327210R
Prod_Type3	TRBSR_ID_A
Width (mm)	25,4
Bearing number	L327249/L327210
Bore Diameter (mm)	133,35
Outer Diameter (mm)	177,008
Calculation factor (e)	0,35

(Oil) Lubrication Speed	2400 r/min
Calculation factor (Y0)	0,95
(Grease) Lubrication Speed	1800 r/min
Basic static load rating (C0)	258 kN
Basic dynamic load rating (C)	124 kN