


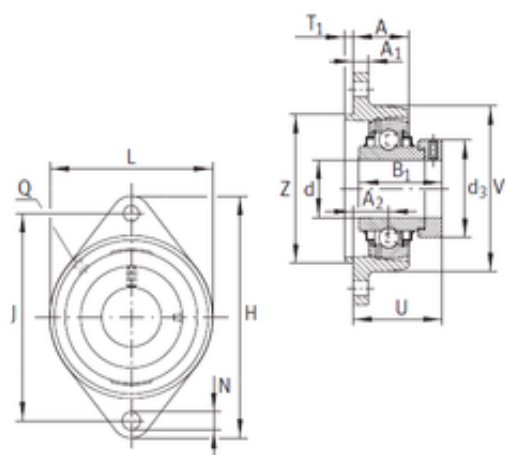

Bearing No. RCJTZ25

N	11,5 mm
d	25 mm
V	70 mm
U	45,9 mm
Z	60 mm
A	26,5 mm
H	124 mm
J	99 mm
L	70 mm
A2	19 mm
T1	3,5 mm
d3	37,5 mm
A1	12 mm
B1	44,5 mm
Noun	Bearing
Bore	0.984 Inch 25 Millimeter
Seals	Double Land Riding Rubber Contact
UNSPSC	31171501
Weight	0,64 Kg
Category	Flange Block
Inventory	0.0
Thread (Q)	Rp1/8
Weight / LBS	1.411
Bolt Spacing	3.9 Inch 99 Millimeter
Product Group	M06110
Housing Style	2 Bolt Flange Block
Inch - Metric	Metric
Relubricatable	Yes
Keyword String	Flanged

Other Features	Single Row Centering Spigot With Set Screw
Bearing number	RCJTZ25
Mounting Bolts	11.5 Millimeter
Rolling Element	Ball Bearing
Mounting Method	Eccentric Collar
Housing Material	Cast Iron
Manufacturer URL	http://www.ina.com
Length Thru Bore	1.748 Inch 44.4 Millimeter
Long Description	2 Bolt Flange Block; 25MM Bore; 99MM Bolt Circle; 99MM Bolt Spacing; 1 Piece Solid; Eccentric Collar Mount; Cast Iron; Ball Bearing; 44.4MM Length Thru Bore; Relubricatable; Double Land Riding Rubber
Manufacturer Name	SCHAEFFLER GROUP
Weight / Kilogram	0.64
Insert Part Number	GE25KRRB
Bore Diameter (mm)	25
Pilot Configuration	With Pilot
Minimum Buy Quantity	N/A
Housing Configuration	1 Piece Solid
Cartridge Pilot Depth	0.138 Inch 3.5 Millimeter
Harmonized Tariff Code	8483.20.40.40
Number of Mounting Holes	2
Manufacturer Item Number	RCJTZ25
Cartridge Pilot Diameter	2.362 Inch 60 Millimeter
Expansion / Non-	Non-expansion

expansion	
Basic dynamic load rating (C)	14 kN
Nominal Bolt Circle Diameter Round	3.9 Inch 99 Millimeter