


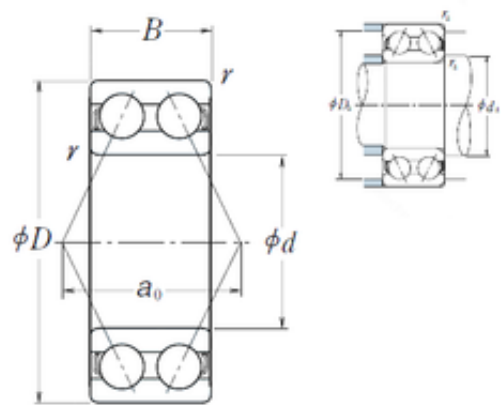

Bearing No. 5212

a	56,5 mm
r	1.5
d	60 mm
D	110 mm
B	36,5 mm
C	36,5 mm
C0	62
B_	36.5
D_	110
Z_	11
ao	56.5
ra	1.5
da	69
DI_	73.156
DE_	101.844
D_a	101
SRI	7.43
DA_	14.288
SRE	7.43
ALP	50
SDM_	87.5
mass	1.35
SREN	0
KBRG	1121
SRIN	0
SRIX	0.03
SREX	0.03
yobi	5212
r min.	1,5 mm
Weight	1,35 Kg

da max	101 mm
LangID	1
Oil rpm	5000
hidYobi	5212
da min.	69 mm
GRS rpm	3800
series:	5200
ra max.	1,5 mm
hidTable	ecat_NSANGBD
Size (mm)	60x110x36.5
Width (mm)	36,5
bore type:	Round
Prod_Type3	ACBB_DR_A
maximum rpm:	5000 rpm
closure type:	Open
Bearing number	5212
bore diameter:	65 mm
contact angle:	25 °
cage material:	Steel Cage
overall width:	1.5000 in
fillet radius:	1.5 mm
finish/coating:	Uncoated
precision rating:	ABEC1, P0
outside diameter:	120 mm
Bore Diameter (mm)	60
Outer Diameter (mm)	110
snap ring included:	Without Snap Ring
internal clearance:	C0
maximum temperature:	120 °C
row type & fill slot:	Double-Row Non-Fill Slot
(Grease) Lubrication Speed	3 800 r/min

radial dynamic load capacity:	69000 N
Basic static load rating (C0)	62 kN
Basic dynamic load rating (C)	69 kN