


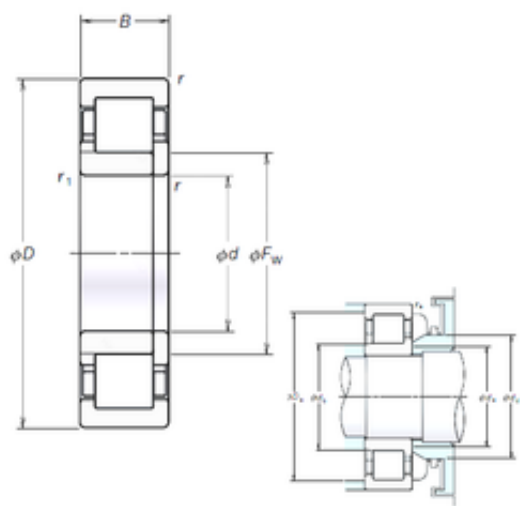

Bearing No. NUP319EM

r	3
D	200 mm
C	45 mm
S	1,5 mm
B	45 mm
d	95 mm
Fw	121,5 mm
Z_	14
r1	3
da	108
C0	385
ra	2.5
rb	2.5
B_	45
D_	200
DA_	28
DE_	177.5
DI_	121.5
yobi	NUP319EM
mass	7.38
SDM_	149.5
KBRG	4165
SBRG	3
db min	108 mm
C_conv	335000
Db max	187 mm
r min.	3 mm
ALPHA_	0
LangID	1
dd min	134

dc min	124
Weight	7,13 Kg
db max	118
da min.	108 mm
D_a max	187
r1 min.	3 mm
rb max.	2,5 mm
TSR rpm	3800
Da max.	187 mm
GRS rpm	3000
Oil rpm	3600
ra max.	2,5 mm
hidYobi	NUP319EM
db max.	118 mm
hidTable	ecat_NSCLDR
Macha rpm	6000
Size (mm)	95x200x45
Prod_Type3	CRB_SR_NUP
Width (mm)	45
Bearing number	NUP319EM
Bore Diameter (mm)	95
Outer Diameter (mm)	200
(Grease) Lubrication Speed	3000 r/min
Basic static load rating (C0)	385 kN
Basic dynamic load rating (C)	335 kN